



Q [m³/h]

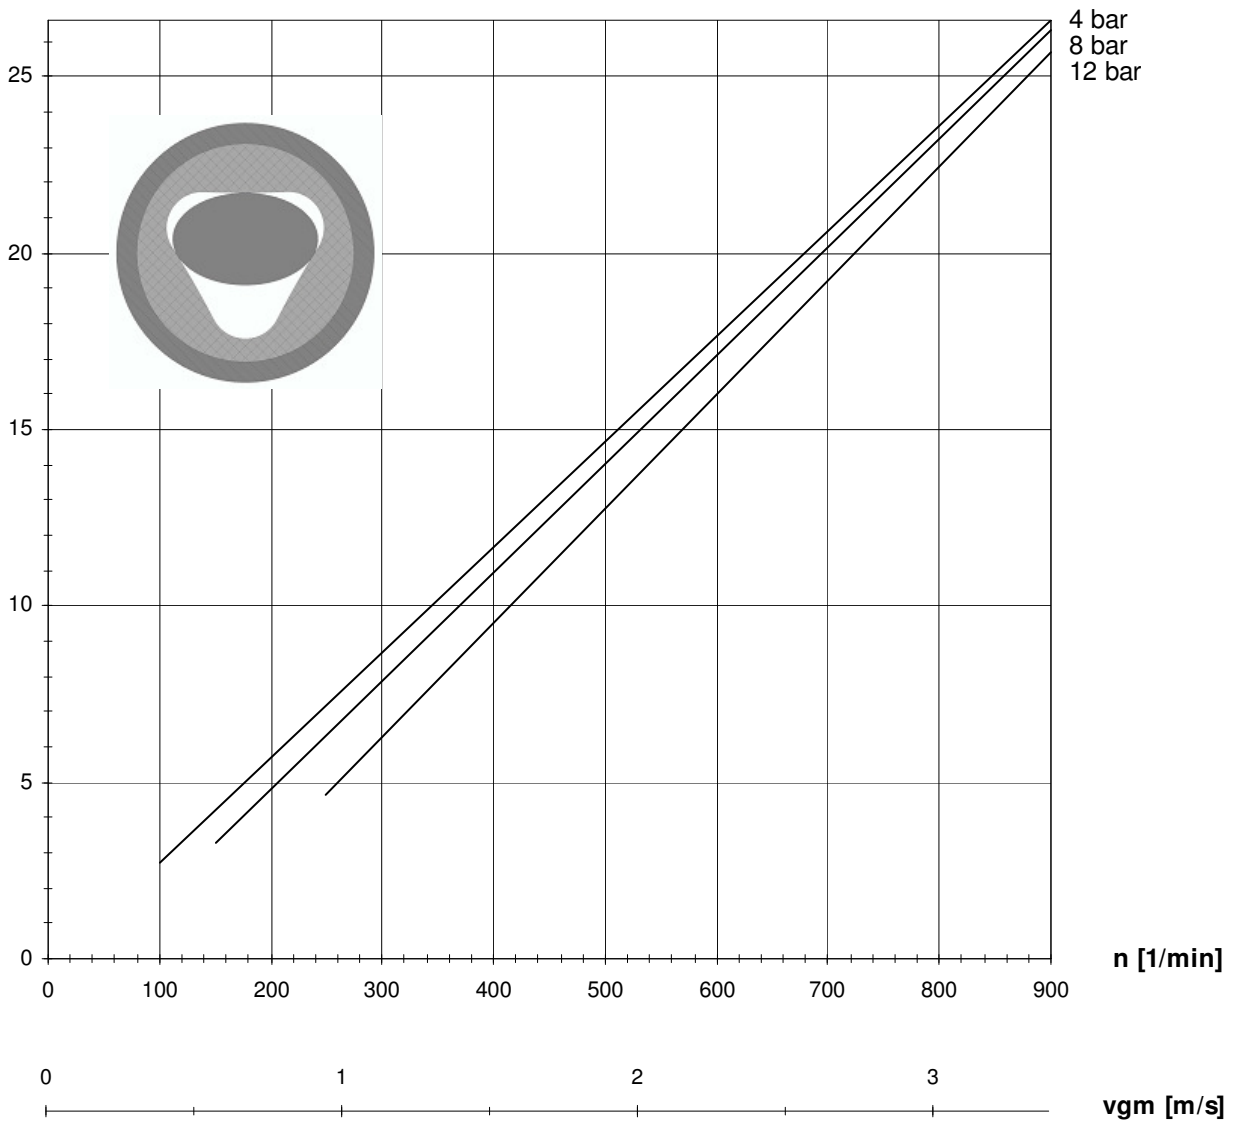

P [kW]

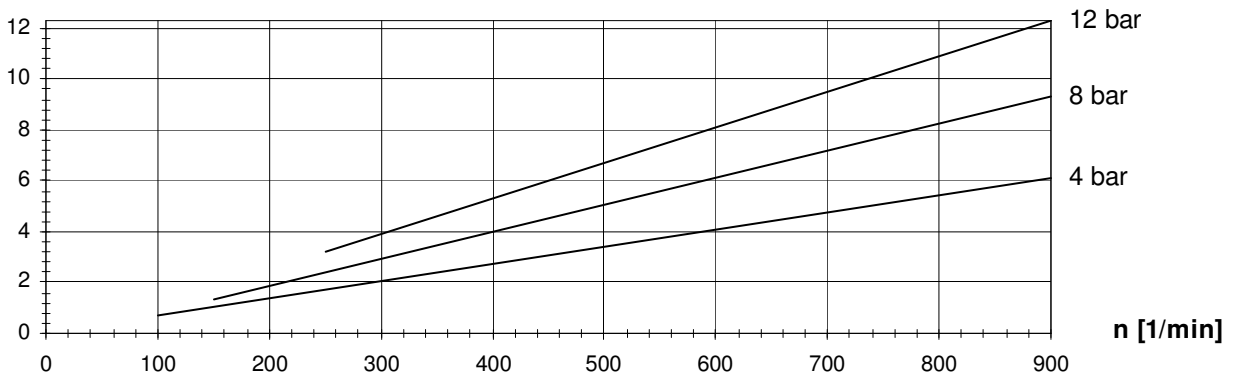


Losbrechmoment / starting torque T(L) = 101 Nm


Druck / pressure	T
4 bar	69 Nm
8 bar	101 Nm
12 bar	134 Nm

Gültigkeit für Wasser (1 cP) bei 20 °C. Toleranzen nach VDMA 24284 (+10%/-5%).  
 Valid for water (1 cP) at 20 °C (70 °F). Tolerances are in accordance with VDMA 24284 (+10%/-5%).

Q [m³/h]

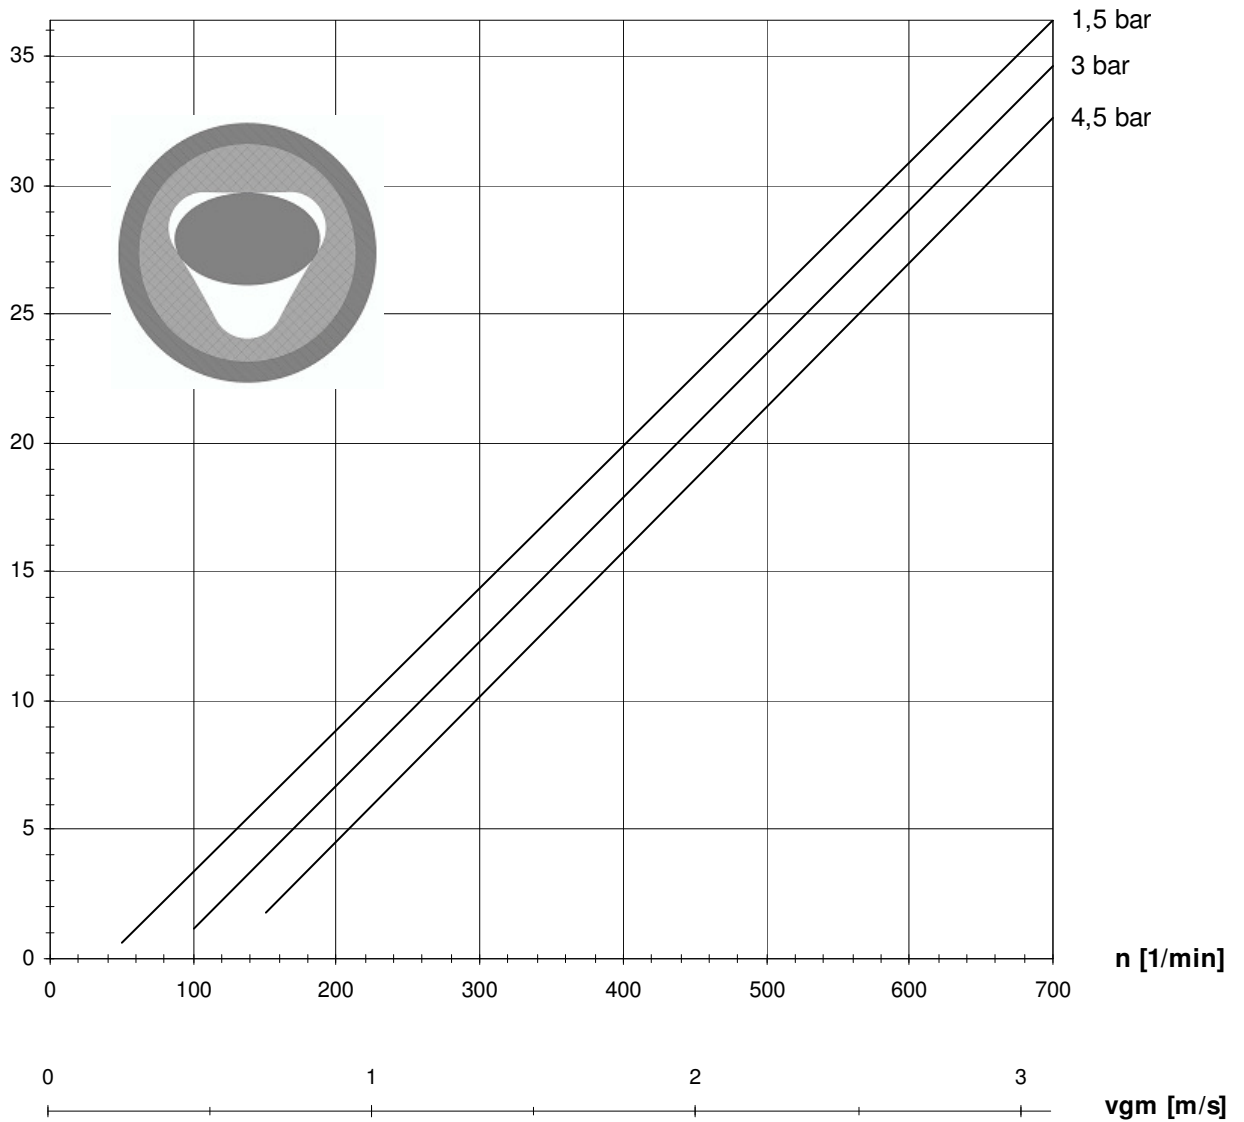

P [kW]

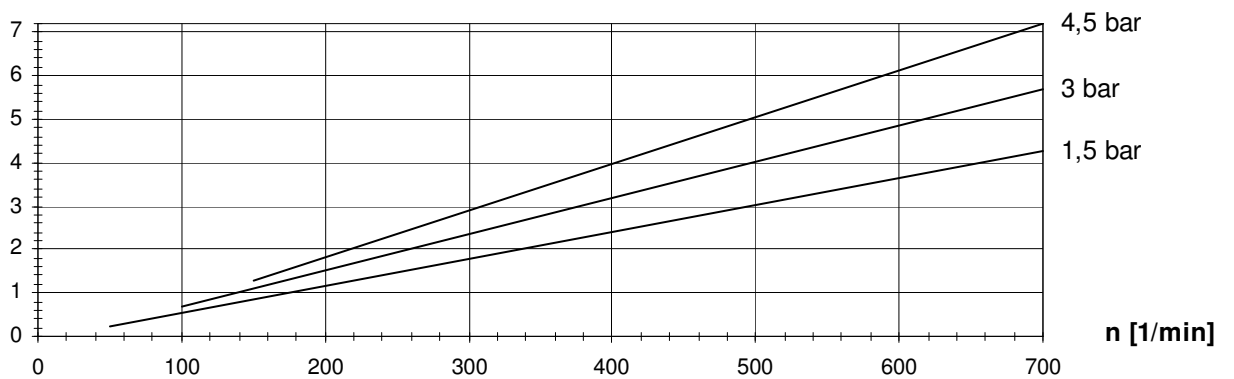


Losbrechmoment / starting torque T(L) = 90 Nm


Druck / pressure	T
1,5 bar	52 Nm
3 bar	70 Nm
4,5 bar	90 Nm

Gültigkeit für Wasser (1 cP) bei 20 °C. Toleranzen nach VDMA 24284 (+10%/-5%).  
 Valid for water (1 cP) at 20 °C (70 °F). Tolerances are in accordance with VDMA 24284 (+10%/-5%).

Q [m³/h]

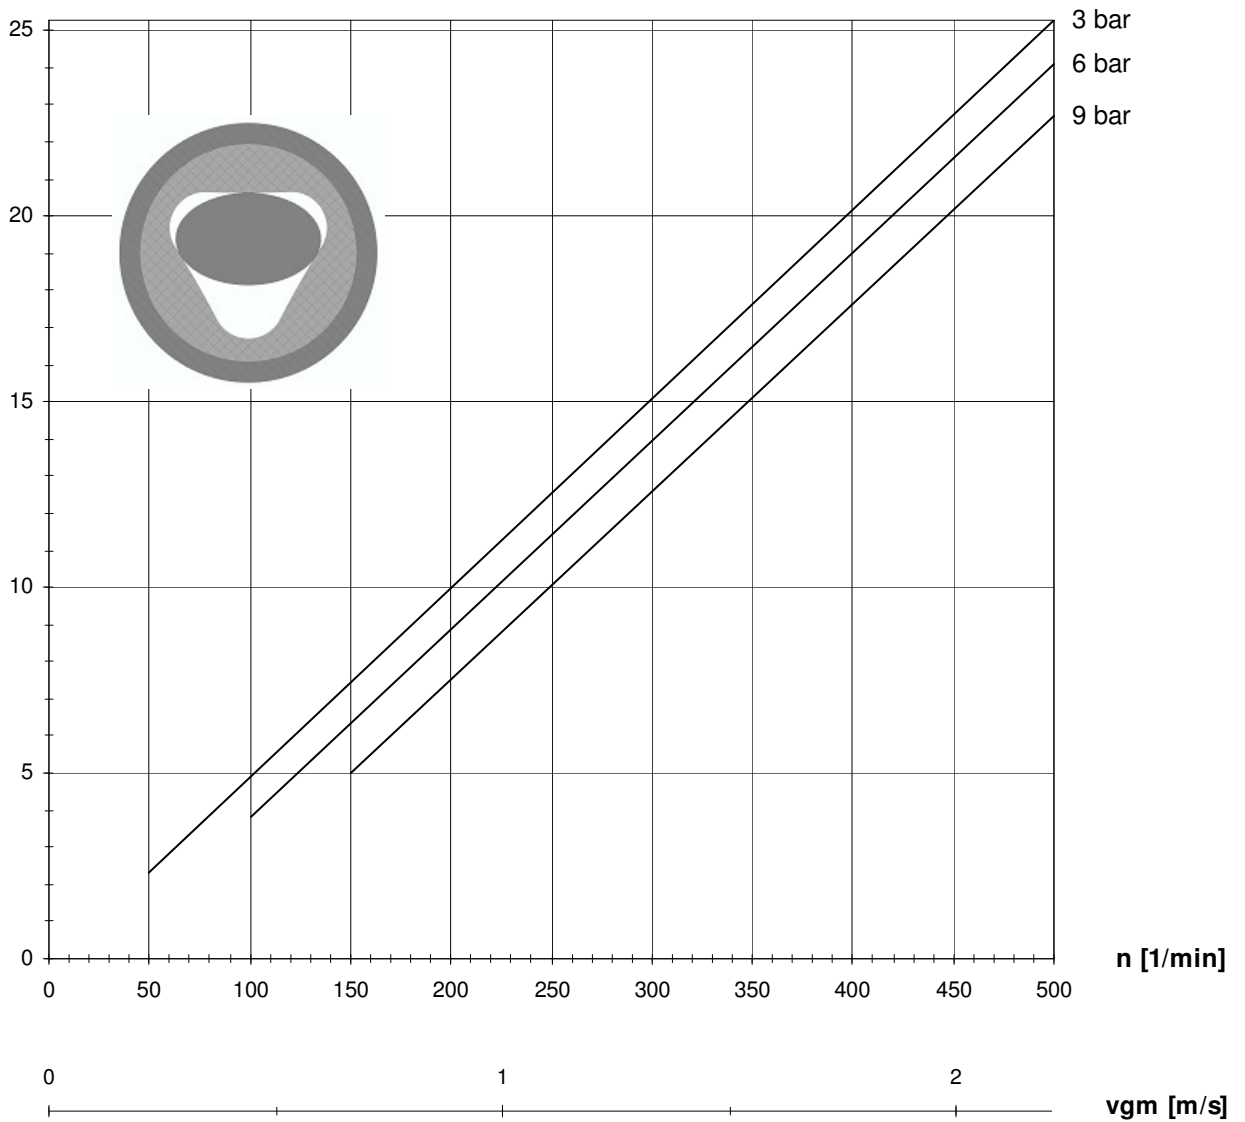

P [kW]

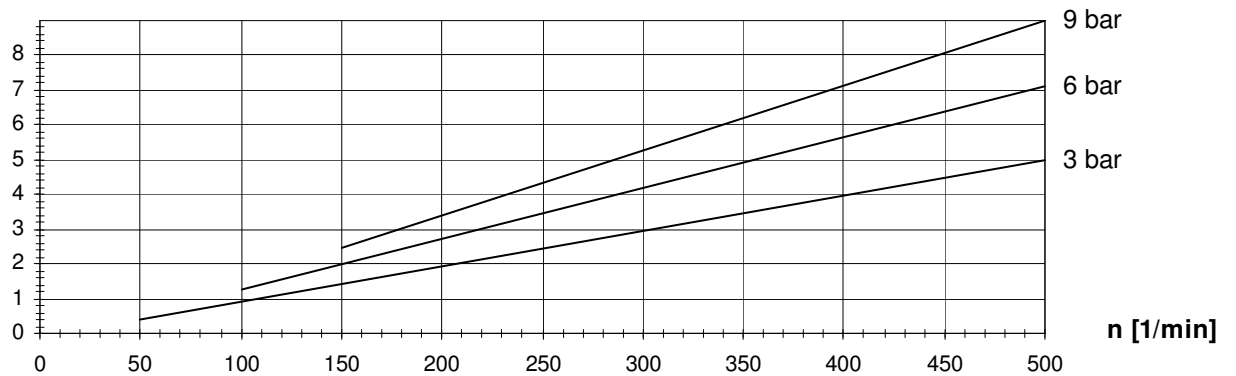


Losbrechmoment / starting torque T(L) = 166 Nm


Druck / pressure	T
3 bar	89 Nm
6 bar	129 Nm
9 bar	166 Nm

Gültigkeit für Wasser (1 cP) bei 20 °C. Toleranzen nach VDMA 24284 (+10%/-5%).  
 Valid for water (1 cP) at 20 °C (70 °F). Tolerances are in accordance with VDMA 24284 (+10%/-5%).

Q [m³/h]

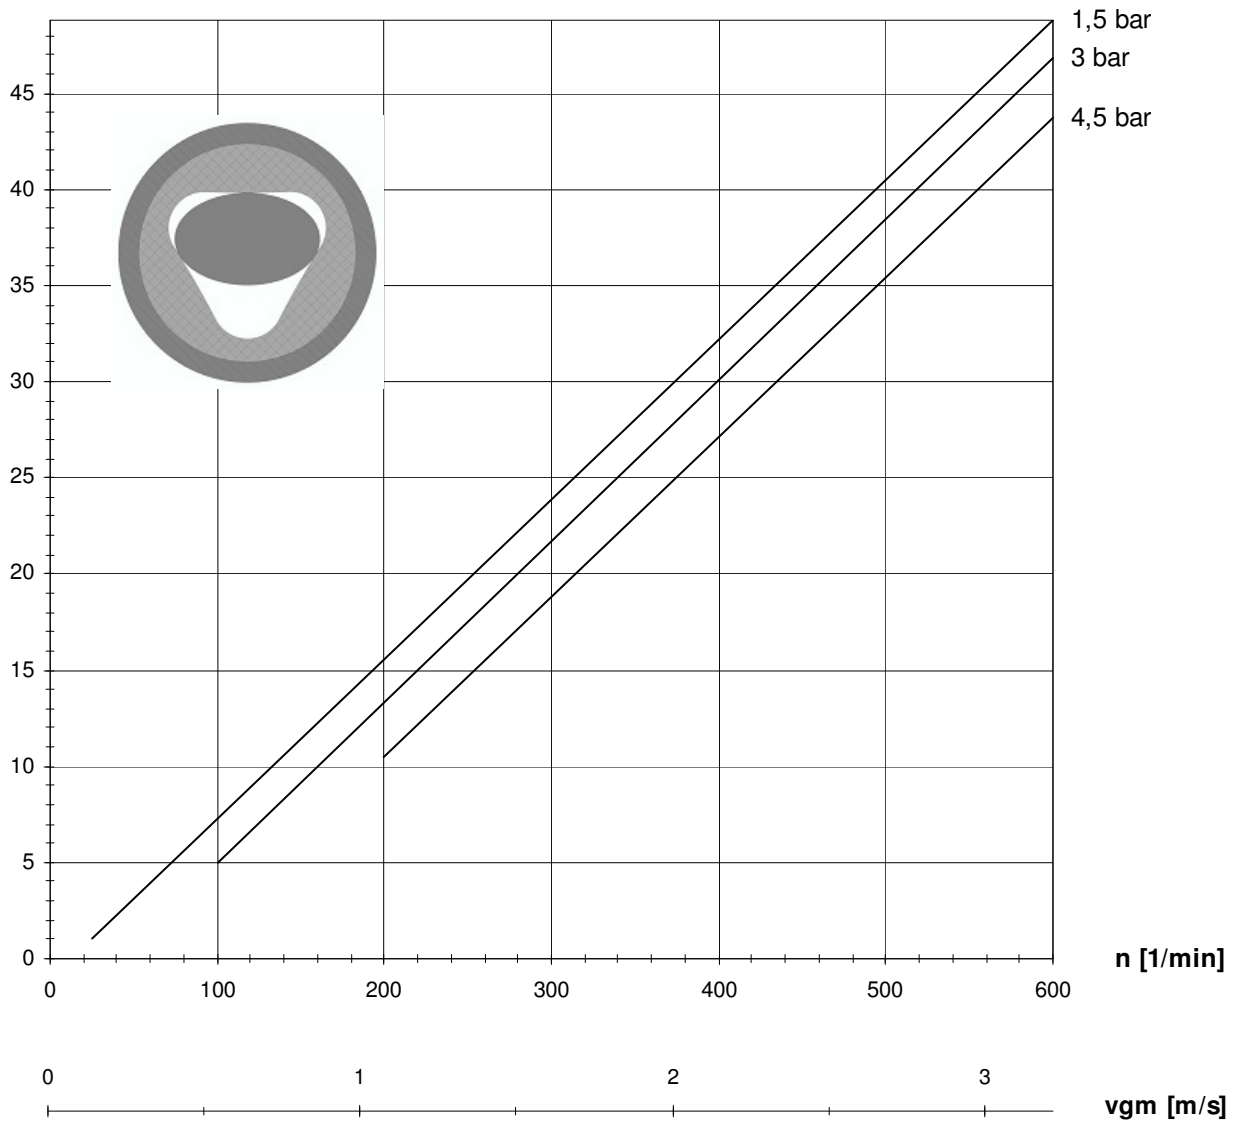

P [kW]

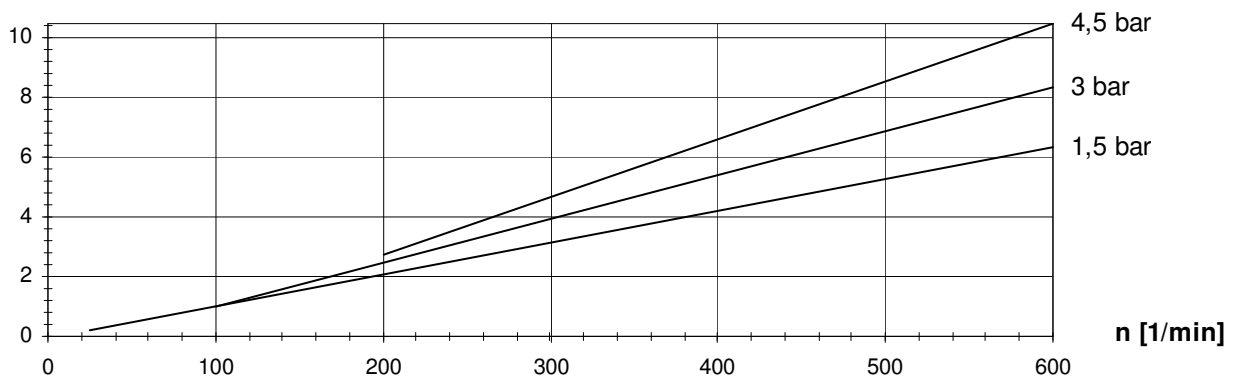


Losbrechmoment / starting torque T(L) = 155 Nm


Druck / pressure	T
1,5 bar	87 Nm
3 bar	120 Nm
4,5 bar	153 Nm

Gültigkeit für Wasser (1 cP) bei 20 °C. Toleranzen nach VDMA 24284 (+10%/-5%).  
 Valid for water (1 cP) at 20 °C (70 °F). Tolerances are in accordance with VDMA 24284 (+10%/-5%).

Q [m³/h]

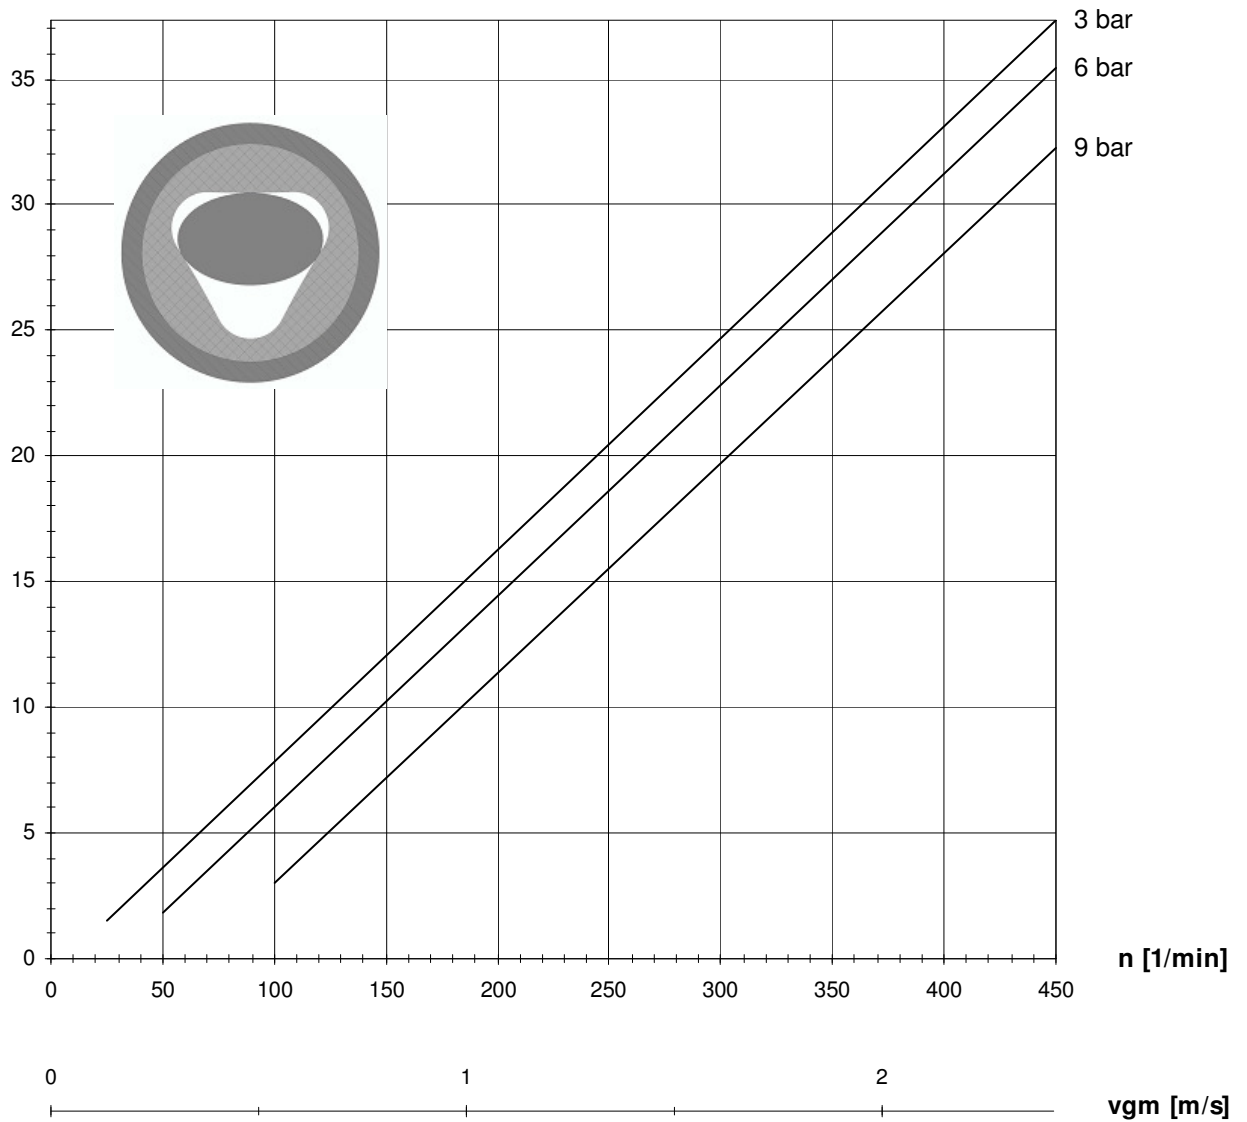

P [kW]

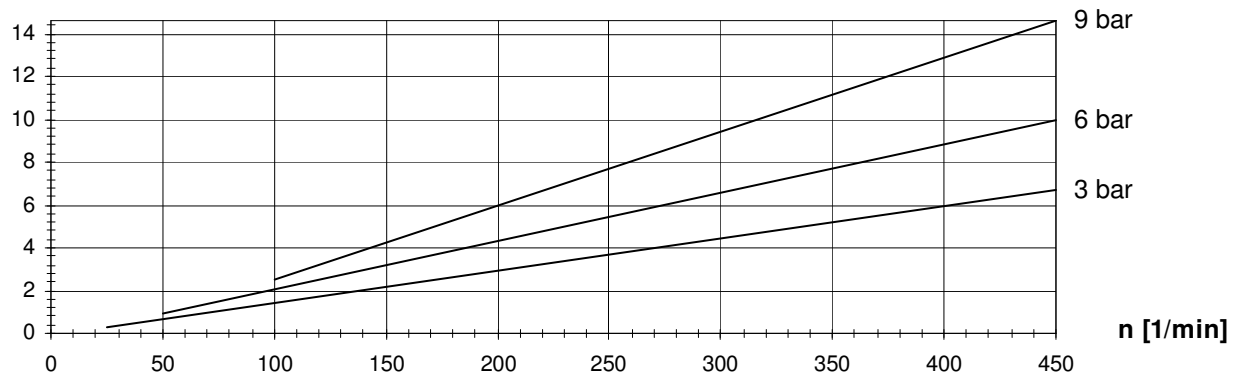


Losbrechmoment / starting torque T(L) = 315 Nm


Druck / pressure	T
3 bar	131 Nm
6 bar	200 Nm
9 bar	280 Nm

Gültigkeit für Wasser (1 cP) bei 20 °C. Toleranzen nach VDMA 24284 (+10%/-5%).  
 Valid for water (1 cP) at 20 °C (70 °F). Tolerances are in accordance with VDMA 24284 (+10%/-5%).

Q [m³/h]

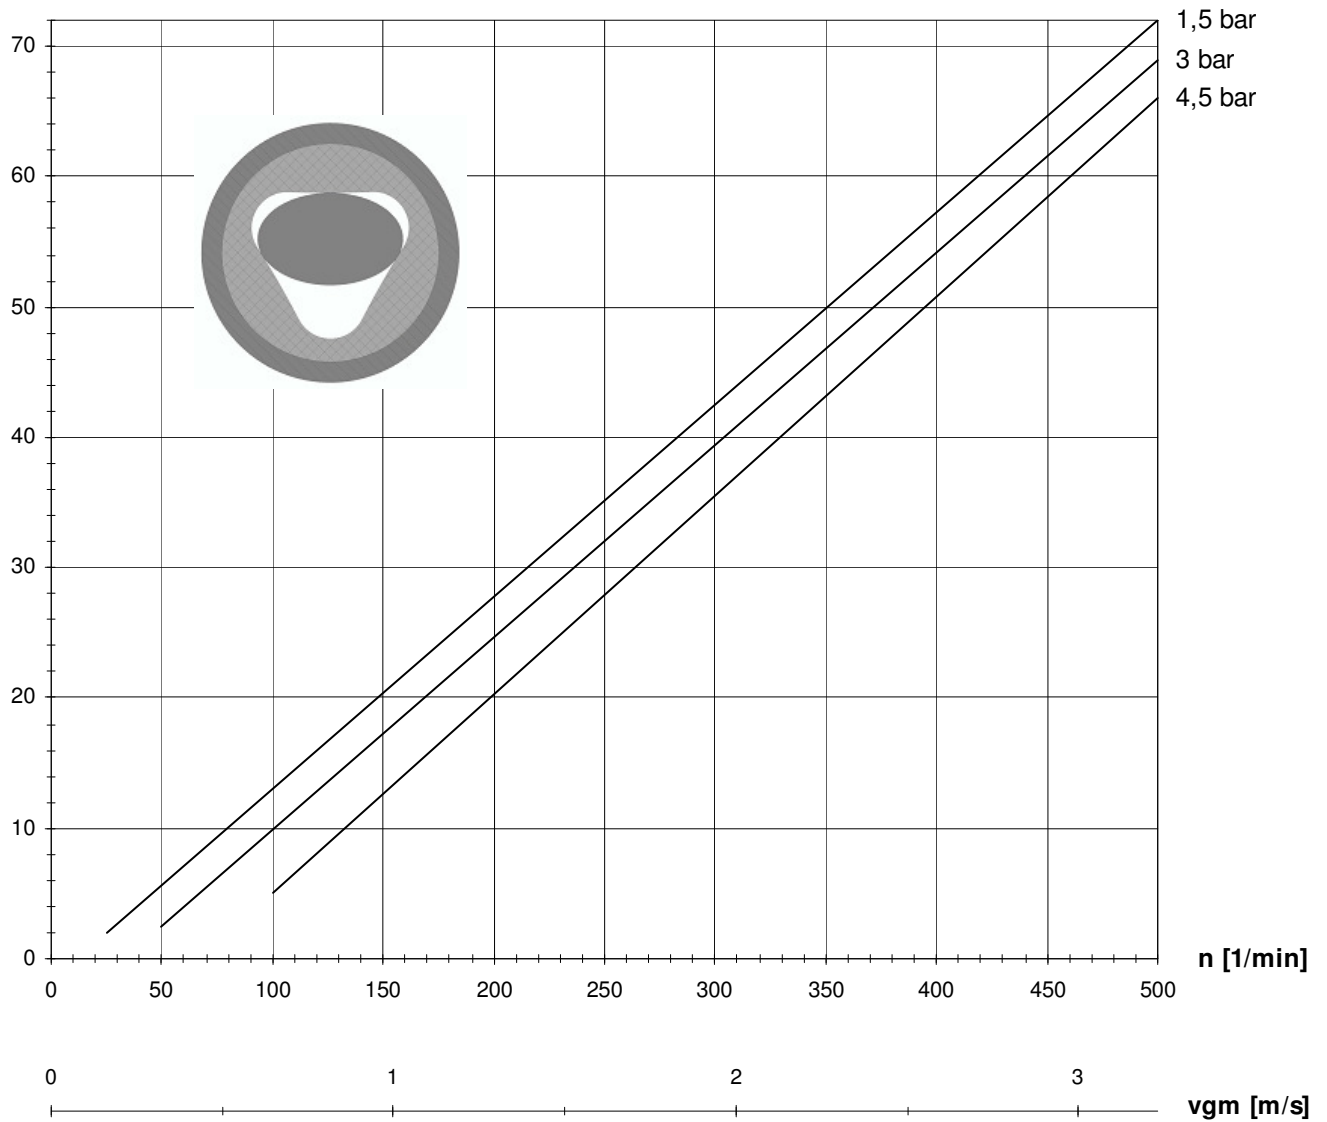

P [kW]

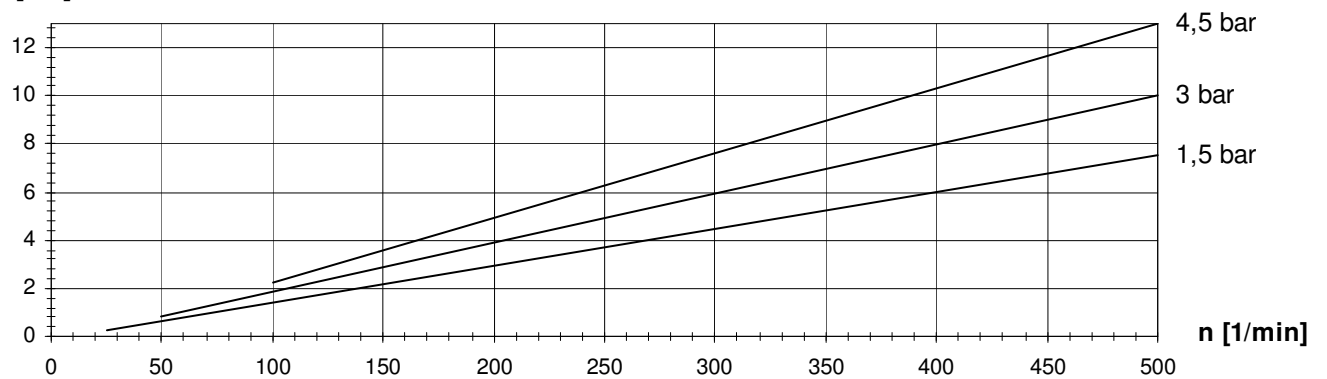


Losbrechmoment / starting torque T(L) = 250 Nm


Druck / pressure	T
1,5 bar	136 Nm
3 bar	193 Nm
4,5 bar	253 Nm

Gültigkeit für Wasser (1 cP) bei 20 °C. Toleranzen nach VDMA 24284 (+10%/-5%).  
 Valid for water (1 cP) at 20 °C (70 °F). Tolerances are in accordance with VDMA 24284 (+10%/-5%).

Q [m³/h]

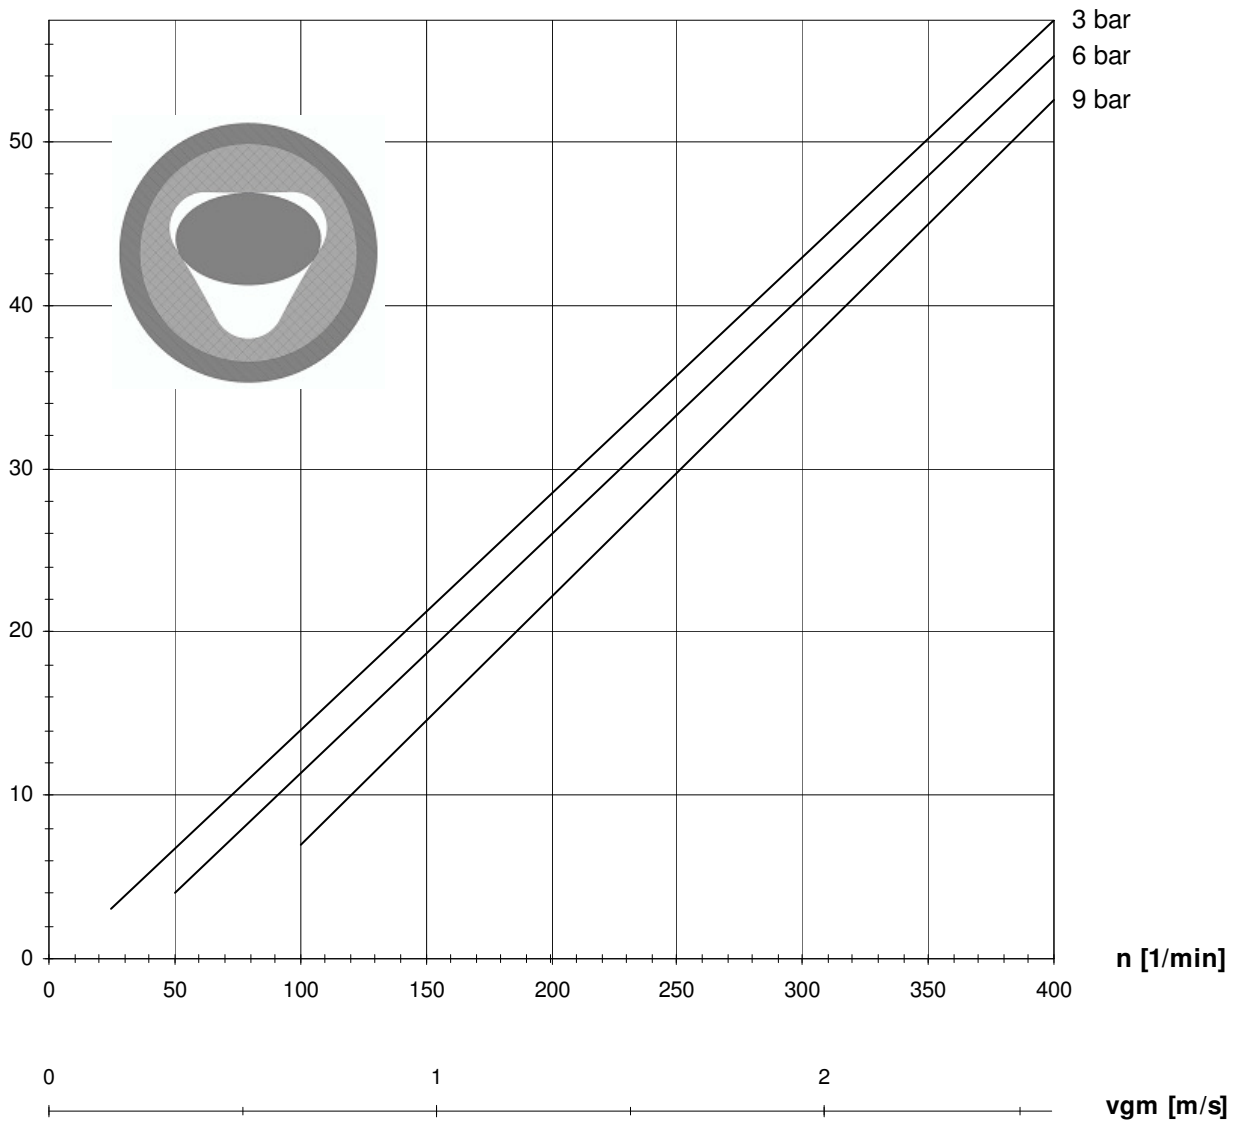

P [kW]

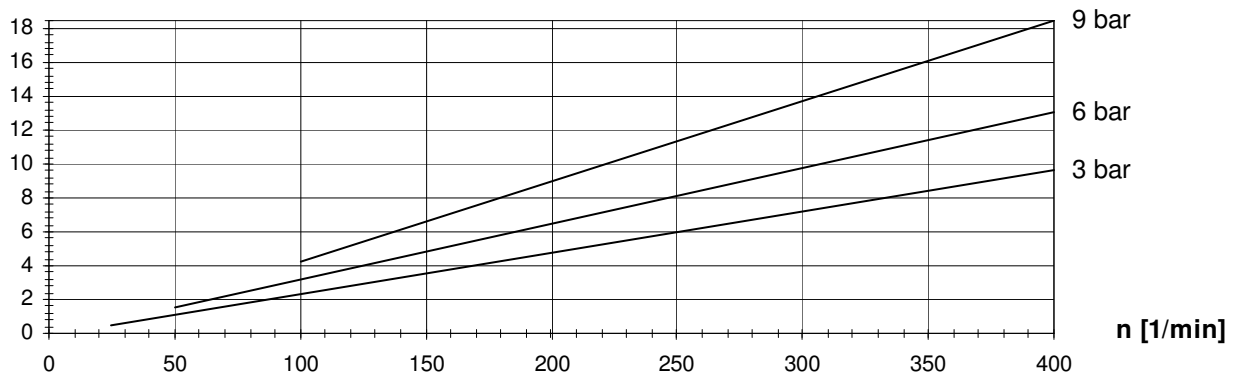


Losbrechmoment / starting torque T(L) = 455 Nm


Druck / pressure	T
3 bar	208 Nm
6 bar	309 Nm
9 bar	434 Nm

Gültigkeit für Wasser (1 cP) bei 20 °C. Toleranzen nach VDMA 24284 (+10%/-5%).  
 Valid for water (1 cP) at 20 °C (70 °F). Tolerances are in accordance with VDMA 24284 (+10%/-5%).

Q [m³/h]

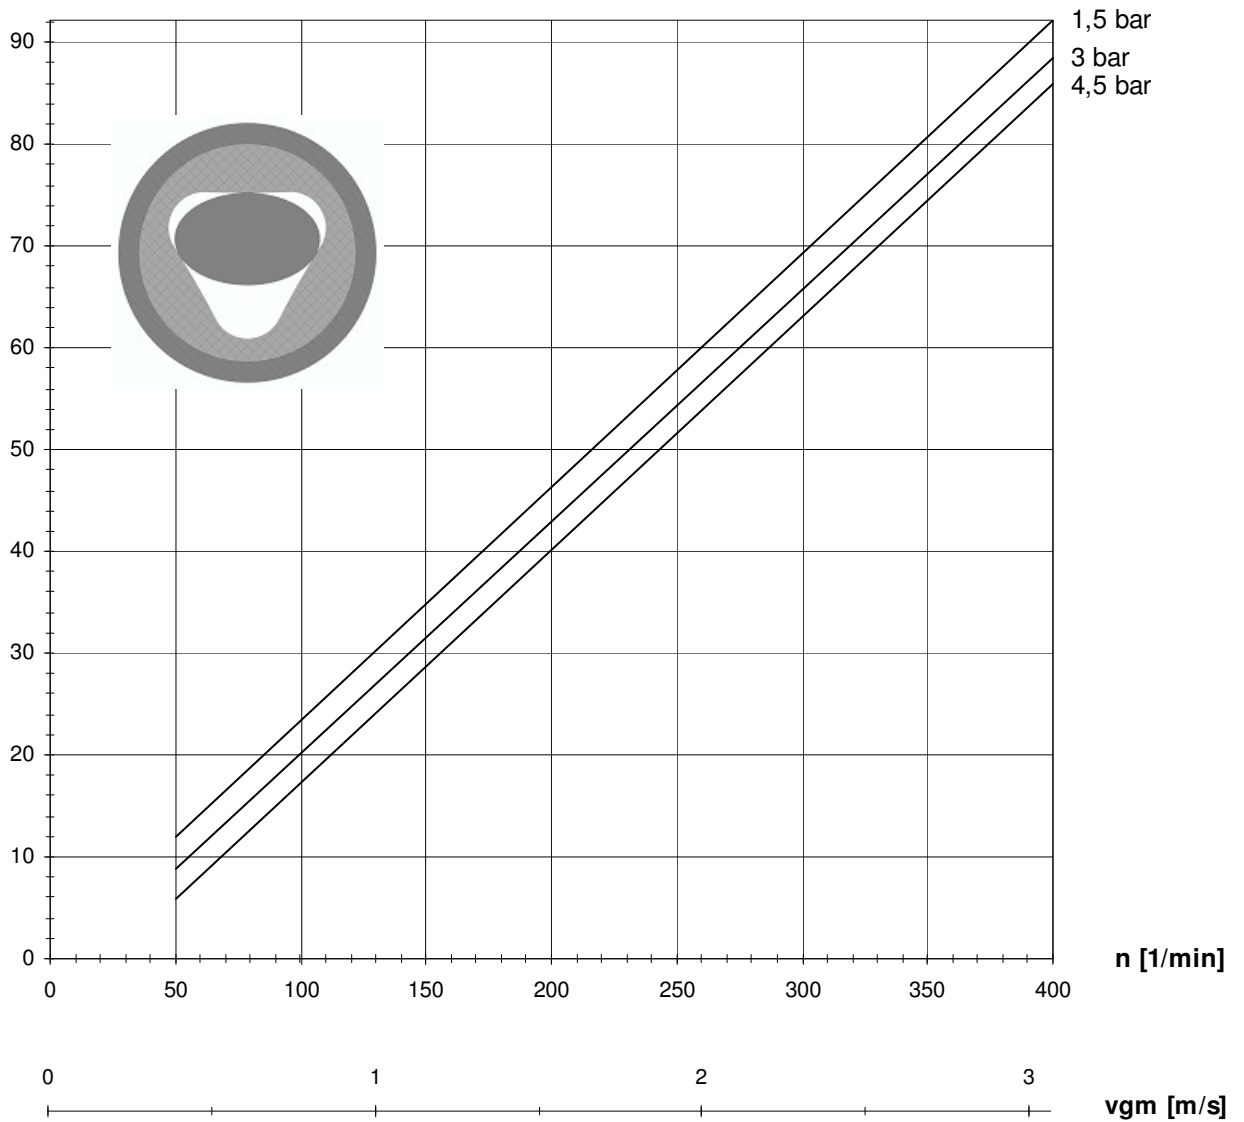

P [kW]

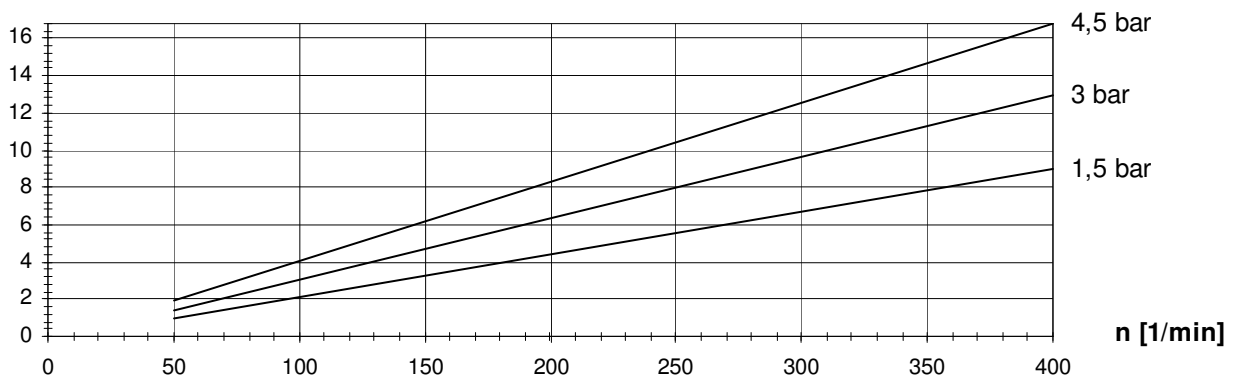


Losbrechmoment / starting torque T(L) = 365 Nm

Druck / pressure	T
1,5 bar	191 Nm
3 bar	284 Nm
4,5 bar	376 Nm


Gültigkeit für Wasser (1 cP) bei 20 °C. Toleranzen nach VDMA 24284 (+10%/-5%).  
 Valid for water (1 cP) at 20 °C (70 °F). Tolerances are in accordance with VDMA 24284 (+10%/-5%).



Q [m³/h]

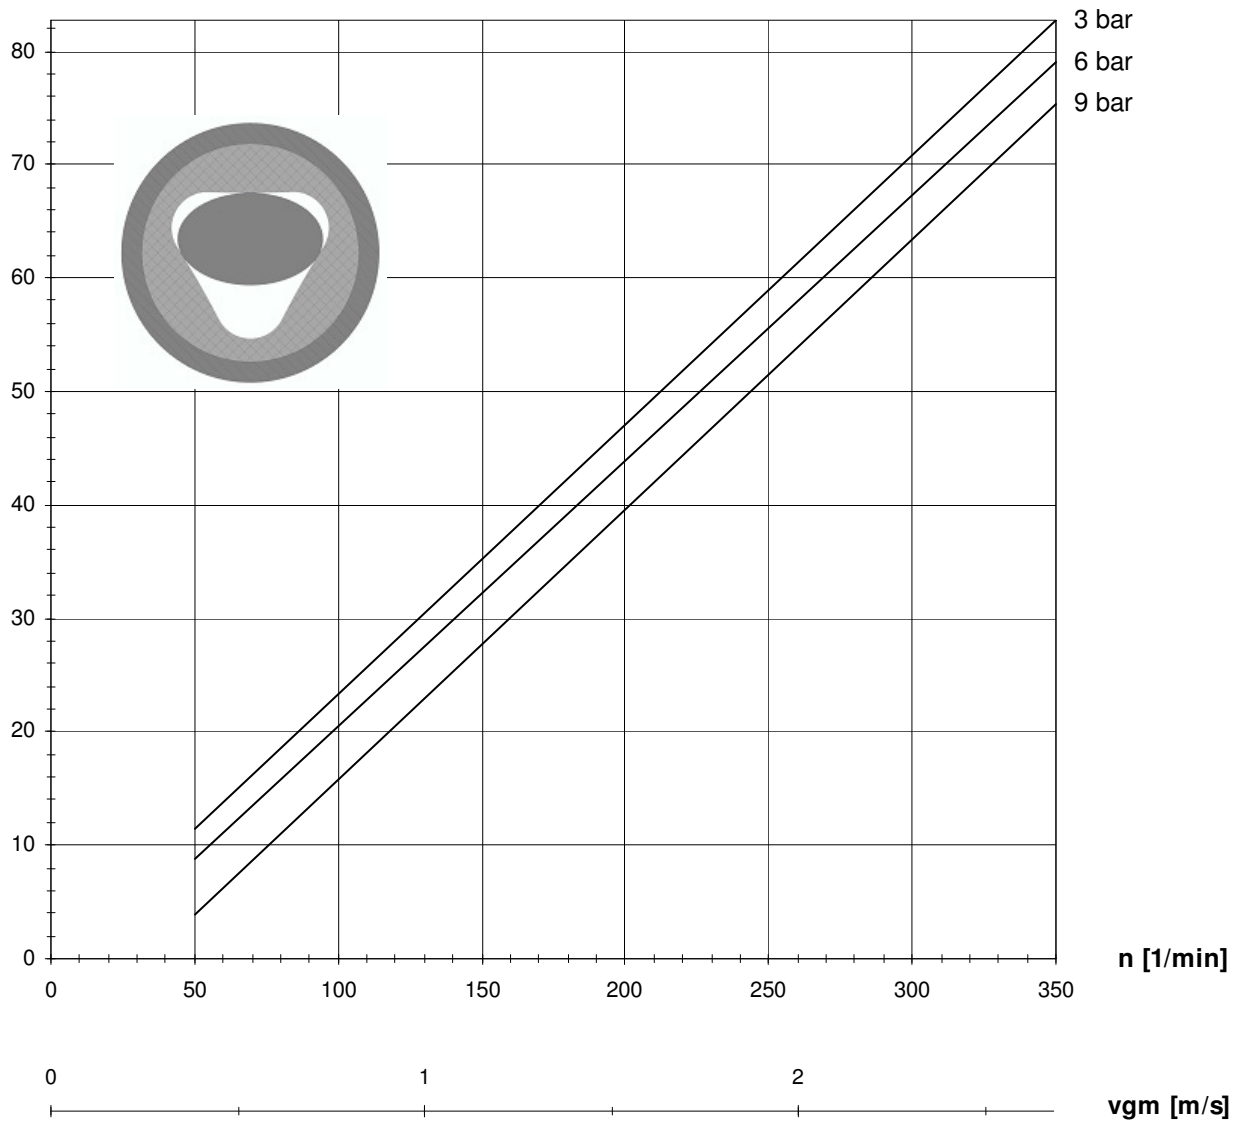

P [kW]

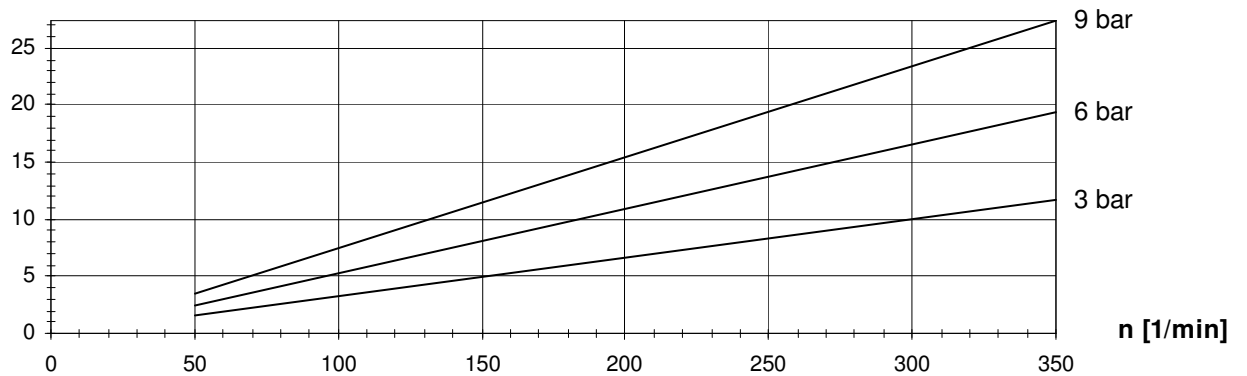


Losbrechmoment / starting torque T(L) = 780 Nm


Druck / pressure	T
3 bar	309 Nm
6 bar	502 Nm
9 bar	704 Nm

Gültigkeit für Wasser (1 cP) bei 20 °C. Toleranzen nach VDMA 24284 (+10%/-5%).  
 Valid for water (1 cP) at 20 °C (70 °F). Tolerances are in accordance with VDMA 24284 (+10%/-5%).

Q [m³/h]

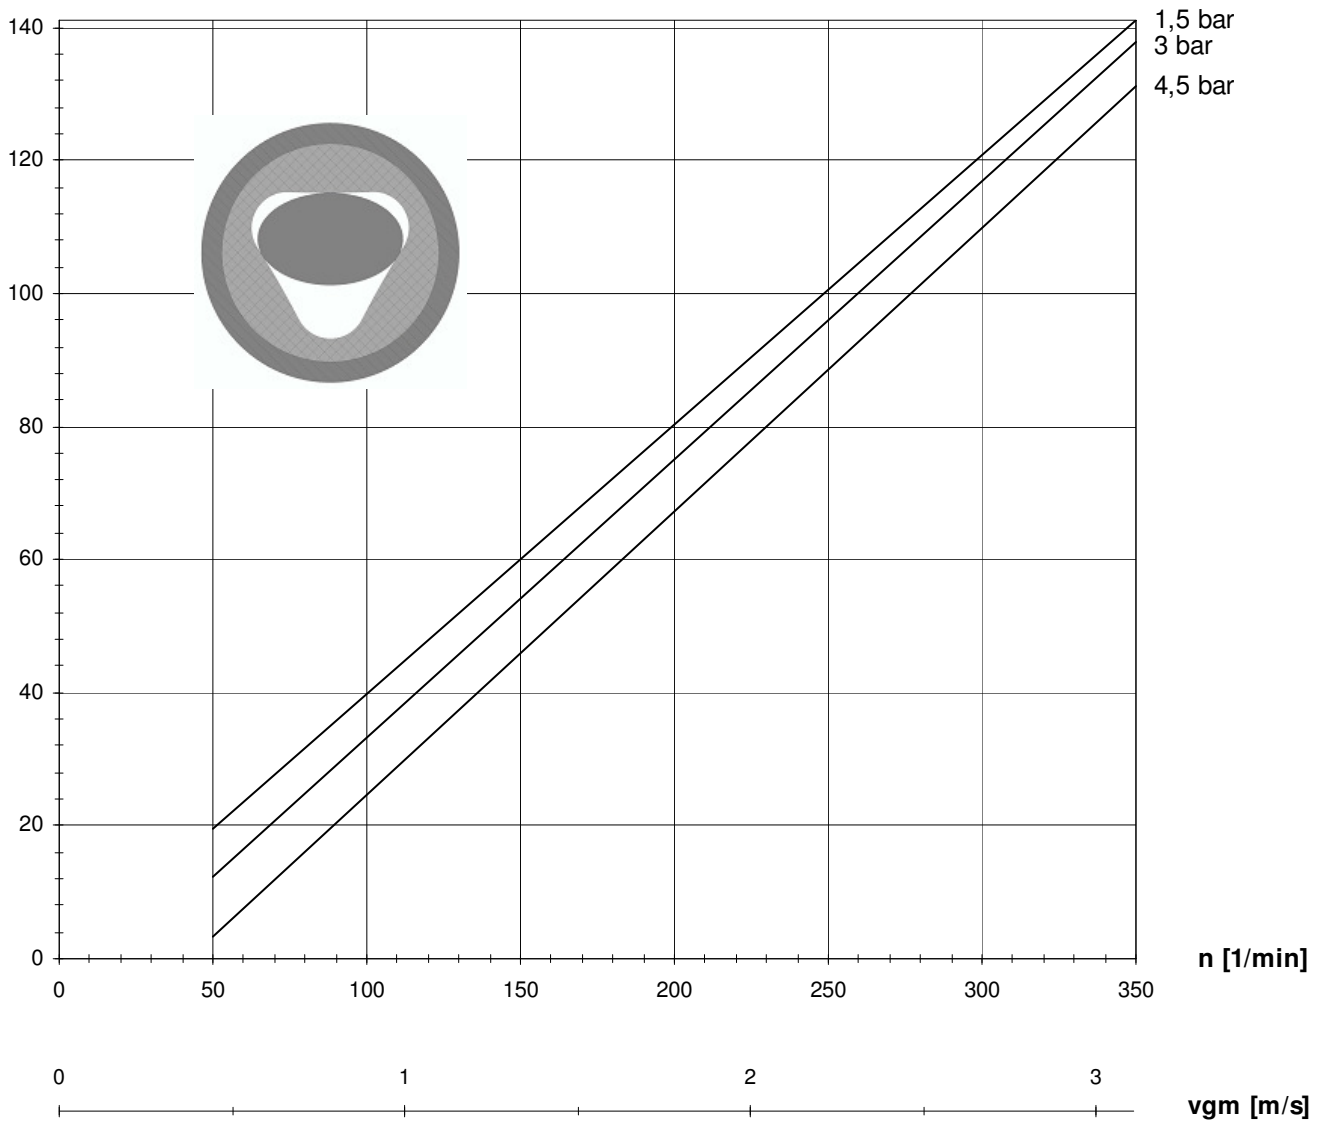

P [kW]

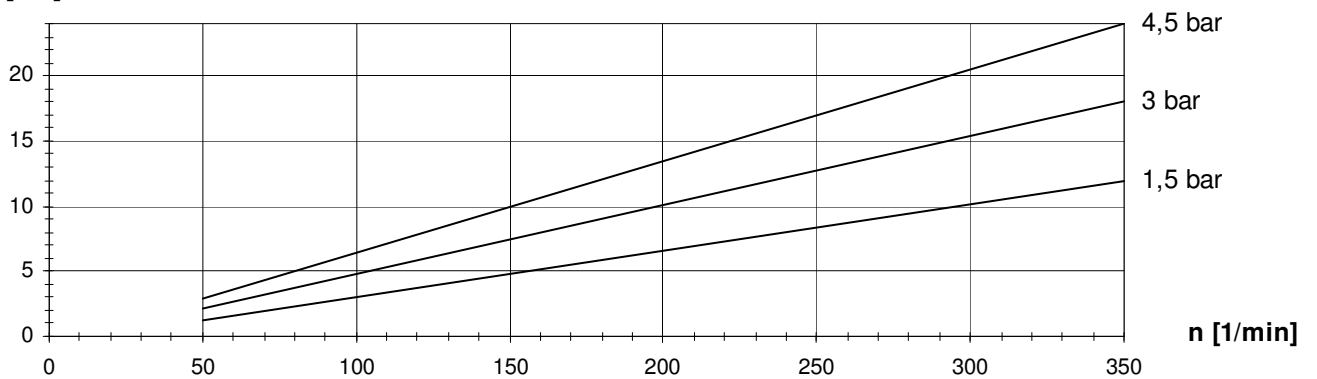


Losbrechmoment / starting torque T(L) = 500 Nm


Druck / pressure	T
1,5 bar	273 Nm
3 bar	451 Nm
4,5 bar	613 Nm

Gültigkeit für Wasser (1 cP) bei 20 °C. Toleranzen nach VDMA 24284 (+10%/-5%).  
 Valid for water (1 cP) at 20 °C (70 °F). Tolerances are in accordance with VDMA 24284 (+10%/-5%).

Q [m³/h]

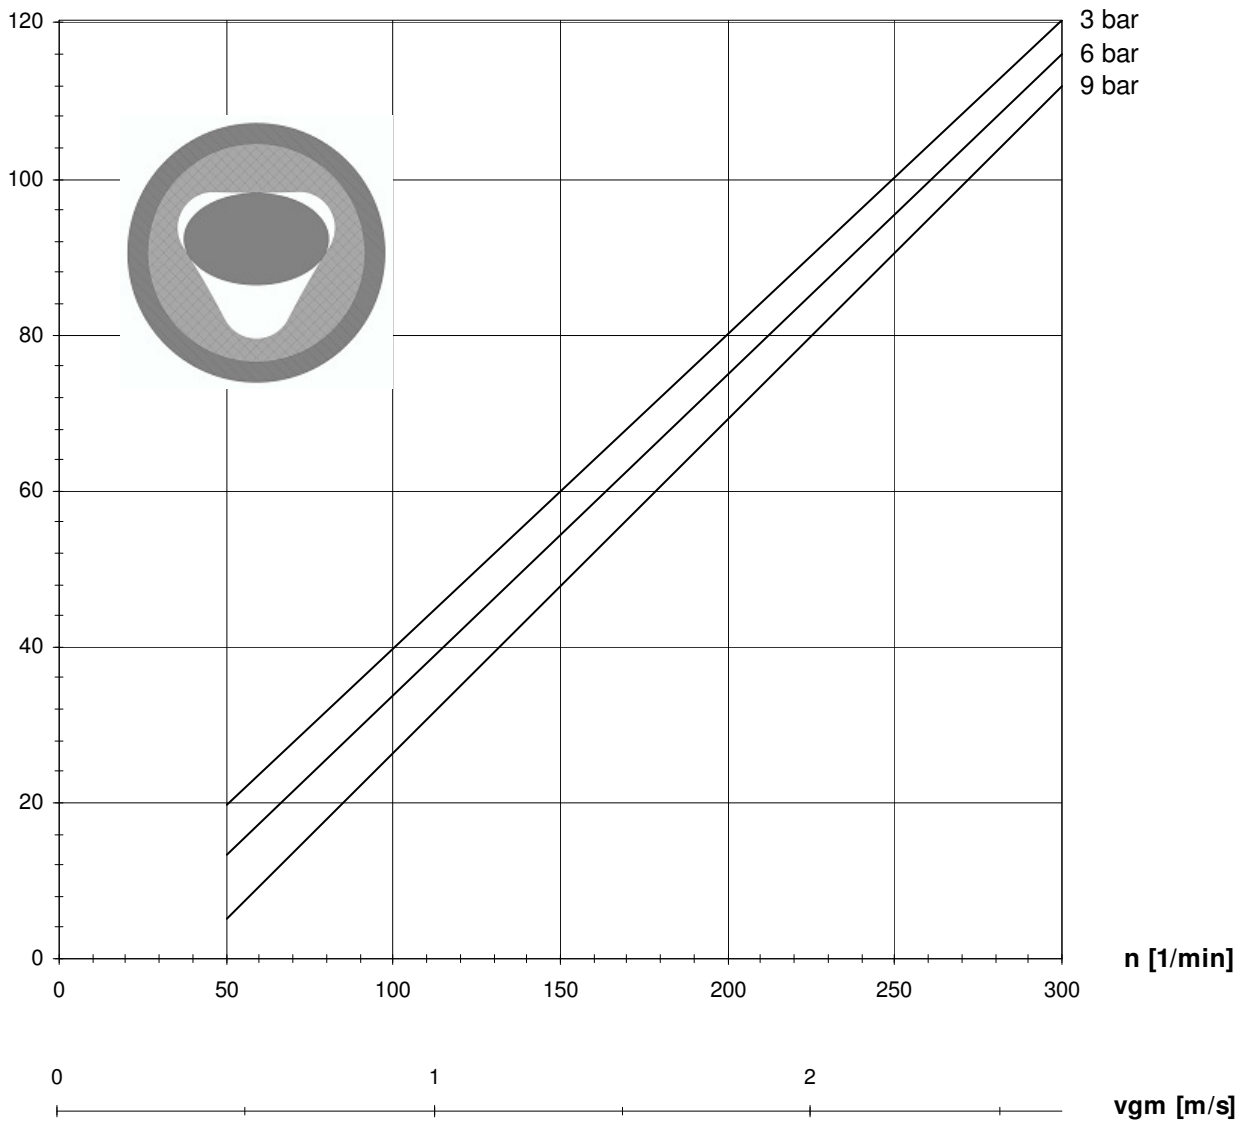

P [kW]

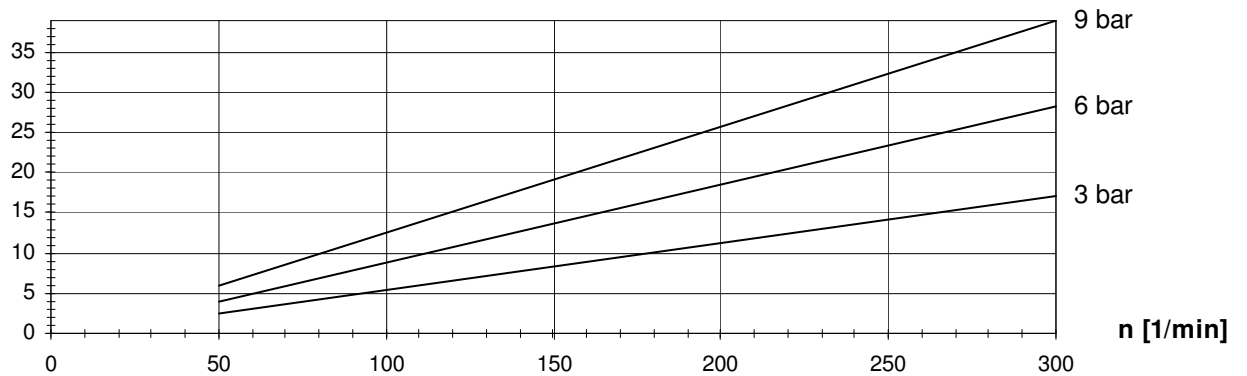


Losbrechmoment / starting torque T(L) = 840 Nm


Druck / pressure	T
3 bar	500 Nm
6 bar	849 Nm
9 bar	1181 Nm

Gültigkeit für Wasser (1 cP) bei 20 °C. Toleranzen nach VDMA 24284 (+10%/-5%).  
 Valid for water (1 cP) at 20 °C (70 °F). Tolerances are in accordance with VDMA 24284 (+10%/-5%).

Q [m³/h]

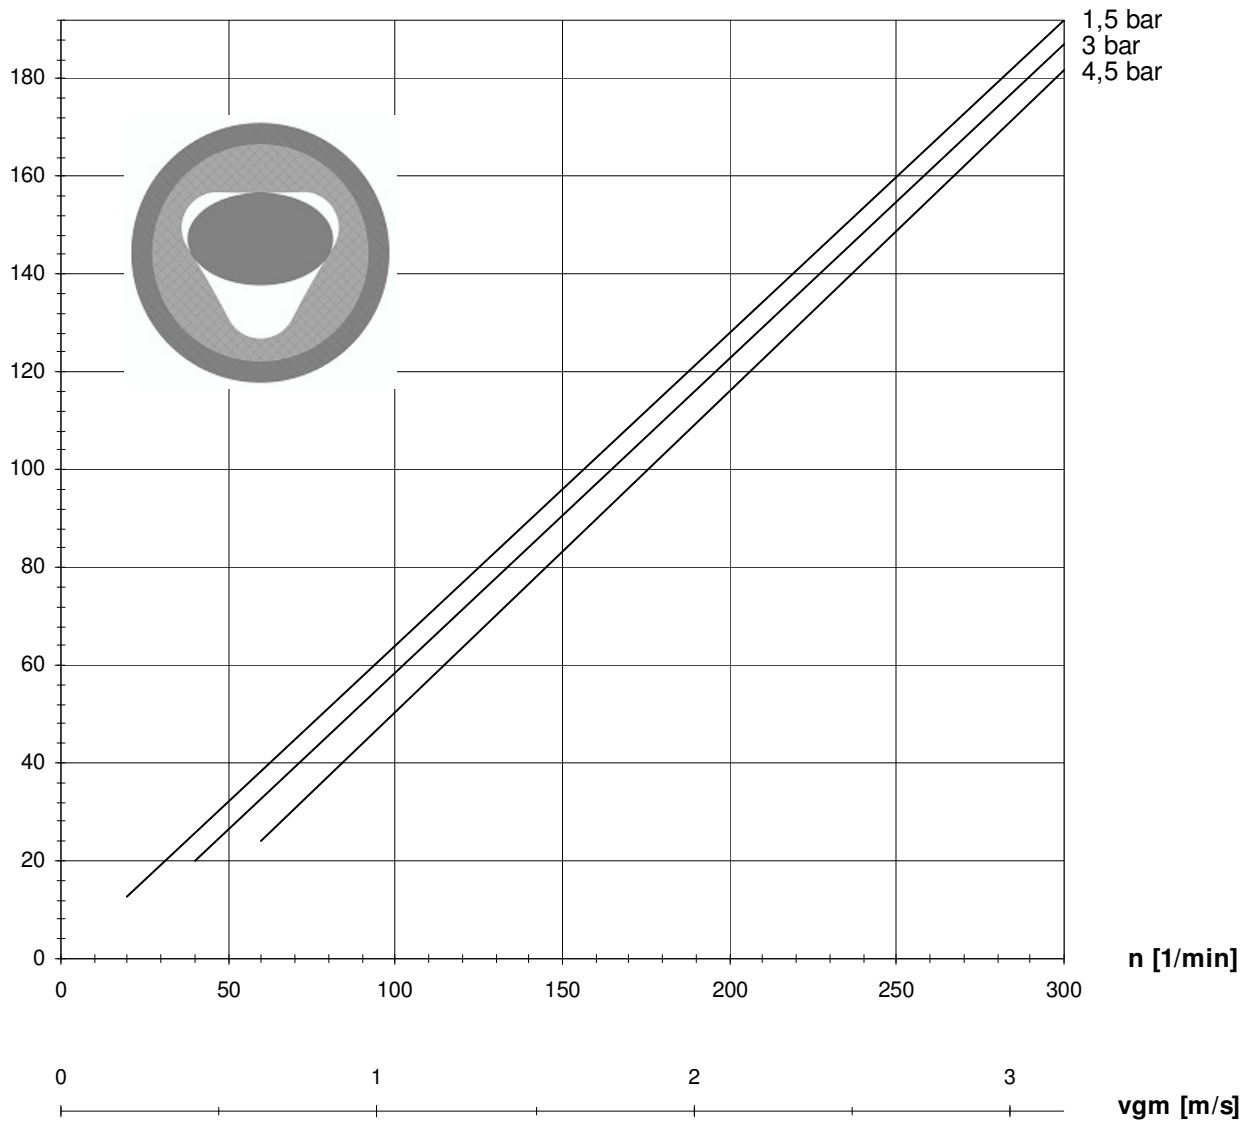

P [kW]

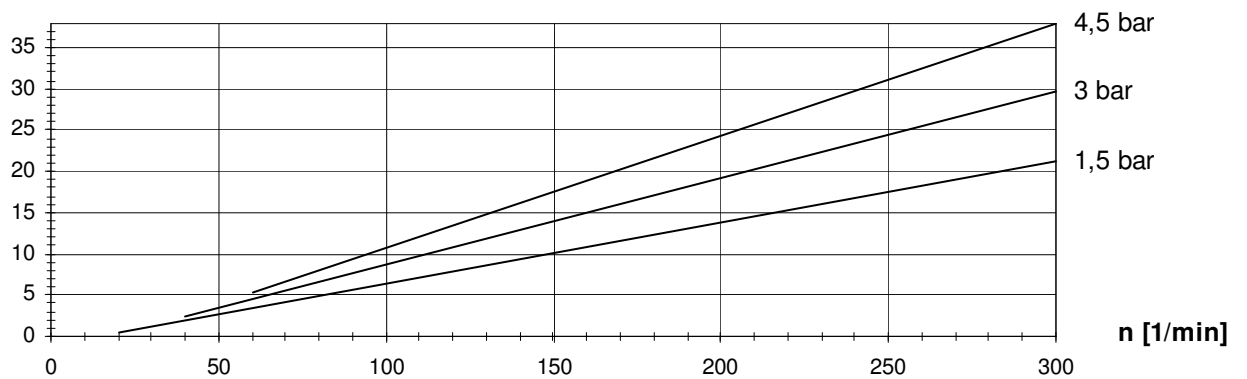


Losbrechmoment / starting torque T(L) = 640 Nm


Druck / pressure	T
1,5 bar	518 Nm
3 bar	782 Nm
4,5 bar	1038 Nm

Gültigkeit für Wasser (1 cP) bei 20 °C. Toleranzen nach VDMA 24284 (+10%/-5%).  
 Valid for water (1 cP) at 20 °C (70 °F). Tolerances are in accordance with VDMA 24284 (+10%/-5%).

Q [m³/h]

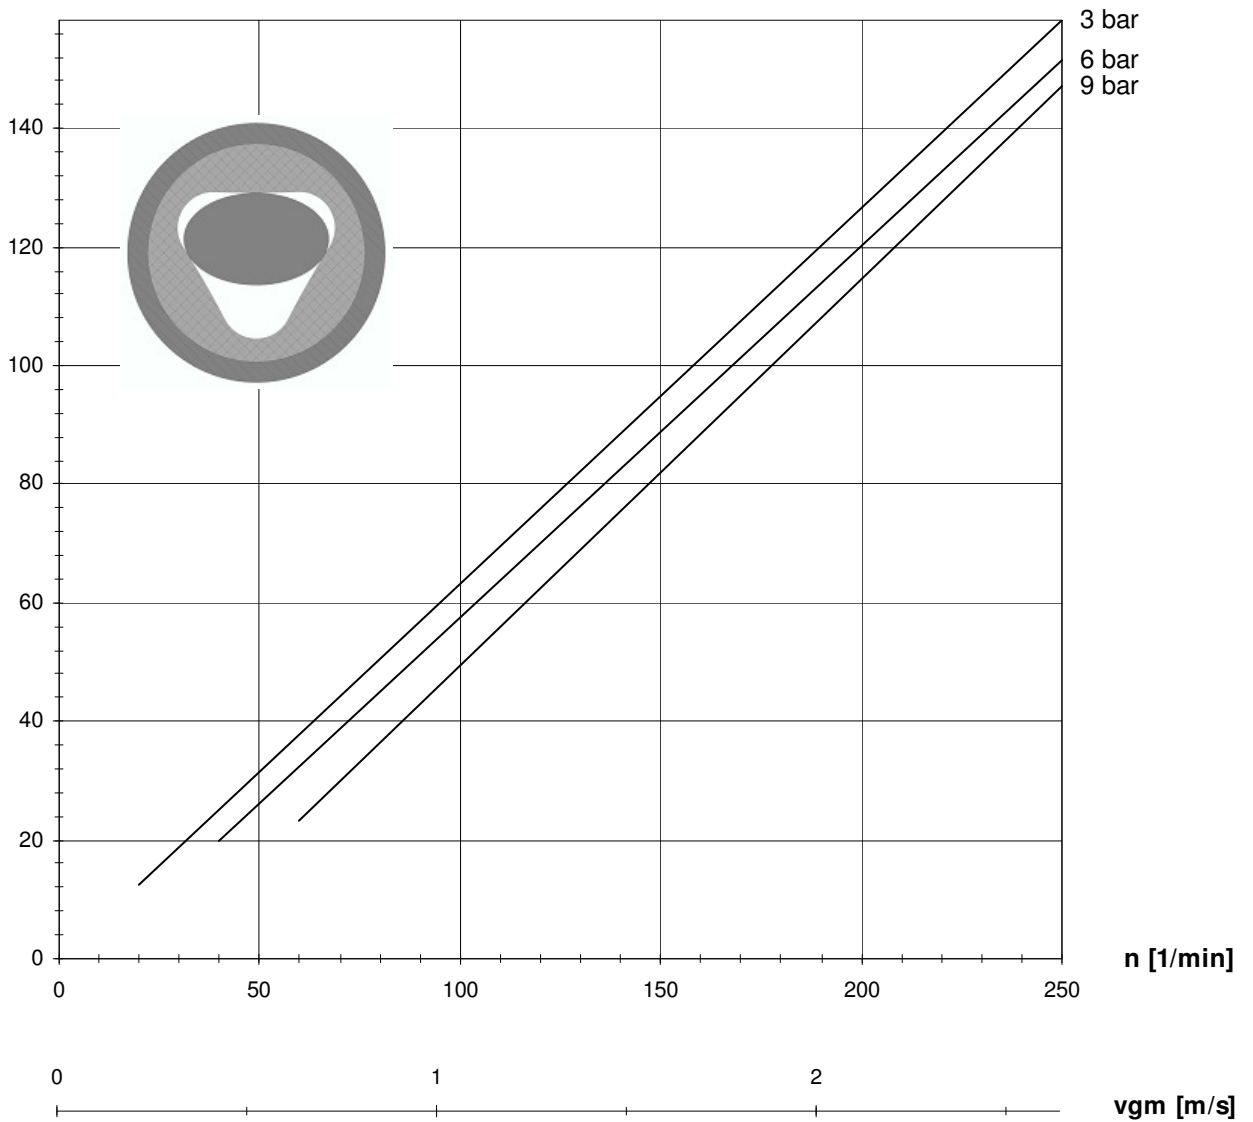

P [kW]

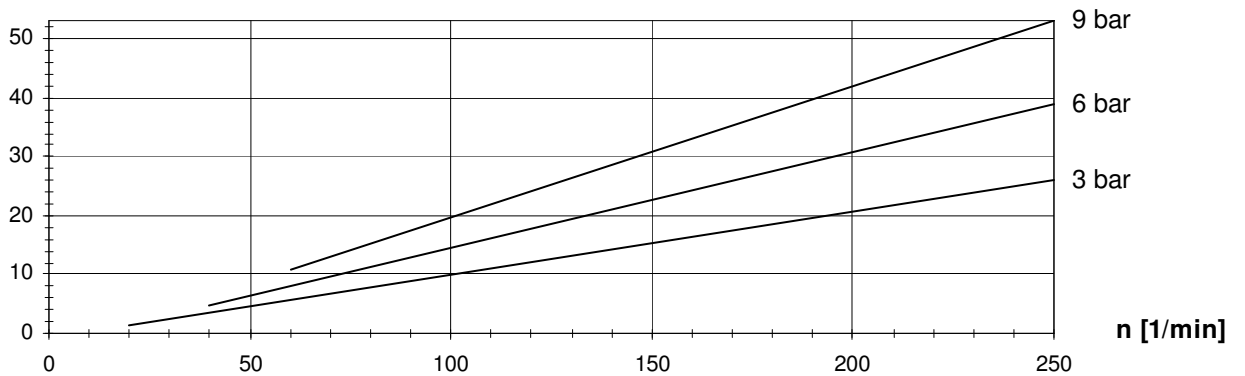


Losbrechmoment / starting torque T(L) = 1070 Nm


Druck / pressure	T
3 bar	872 Nm
6 bar	1406 Nm
9 bar	1946 Nm

Gültigkeit für Wasser (1 cP) bei 20 °C. Toleranzen nach VDMA 24284 (+10%/-5%).  
 Valid for water (1 cP) at 20 °C (70 °F). Tolerances are in accordance with VDMA 24284 (+10%/-5%).

Q [m³/h]

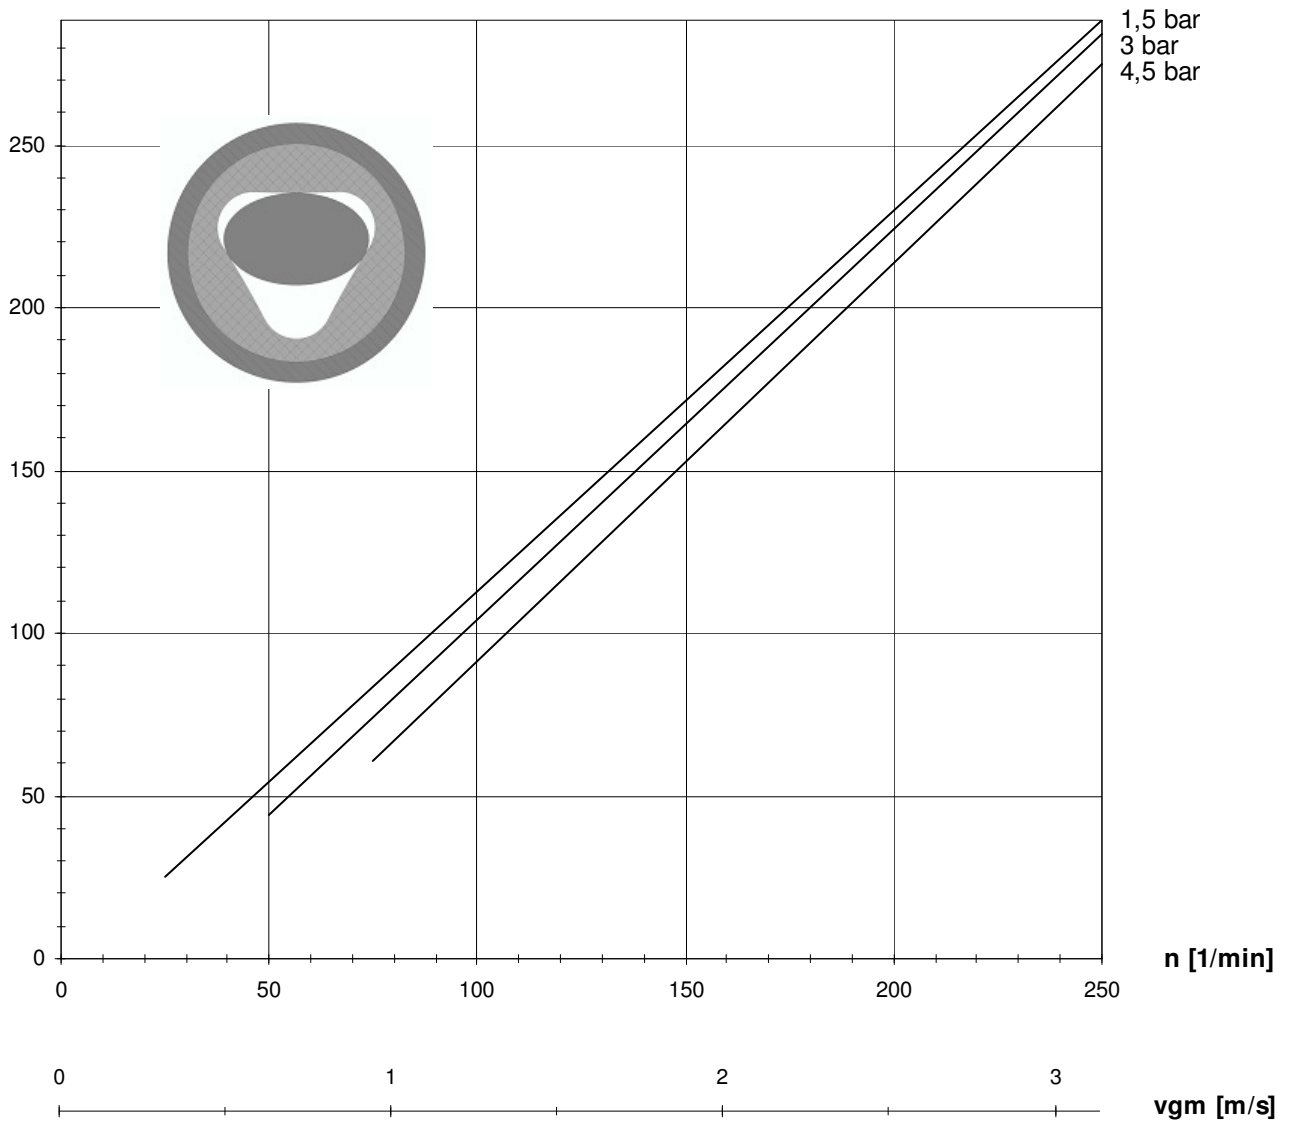

P [kW]

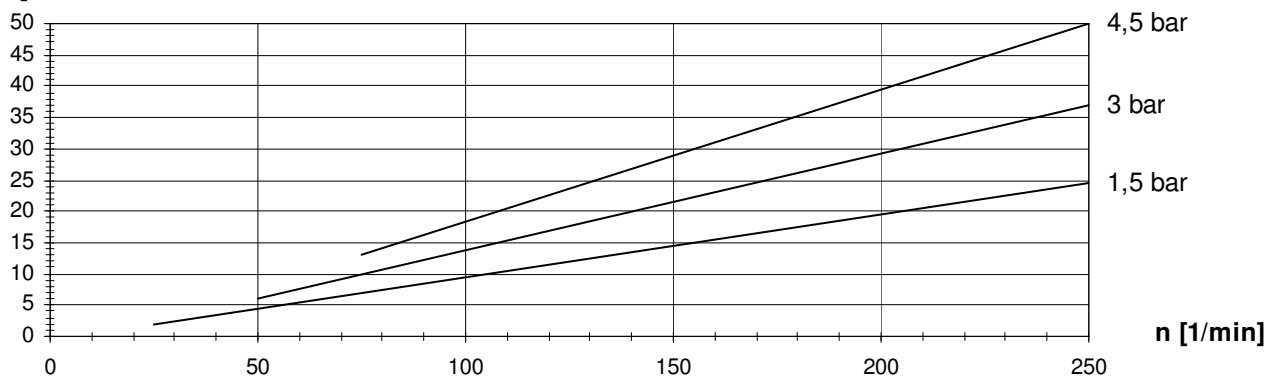


Losbrechmoment / starting torque T(L) = 1470 Nm


Druck / pressure	T
1,5 bar	850 Nm
3 bar	1320 Nm
4,5 bar	1810 Nm

Gültigkeit für Wasser (1 cP) bei 20 °C. Toleranzen nach VDMA 24284 (+10%/-5%).  
 Valid for water (1 cP) at 20 °C (70 °F). Tolerances are in accordance with VDMA 24284 (+10%/-5%).

Q [m³/h]

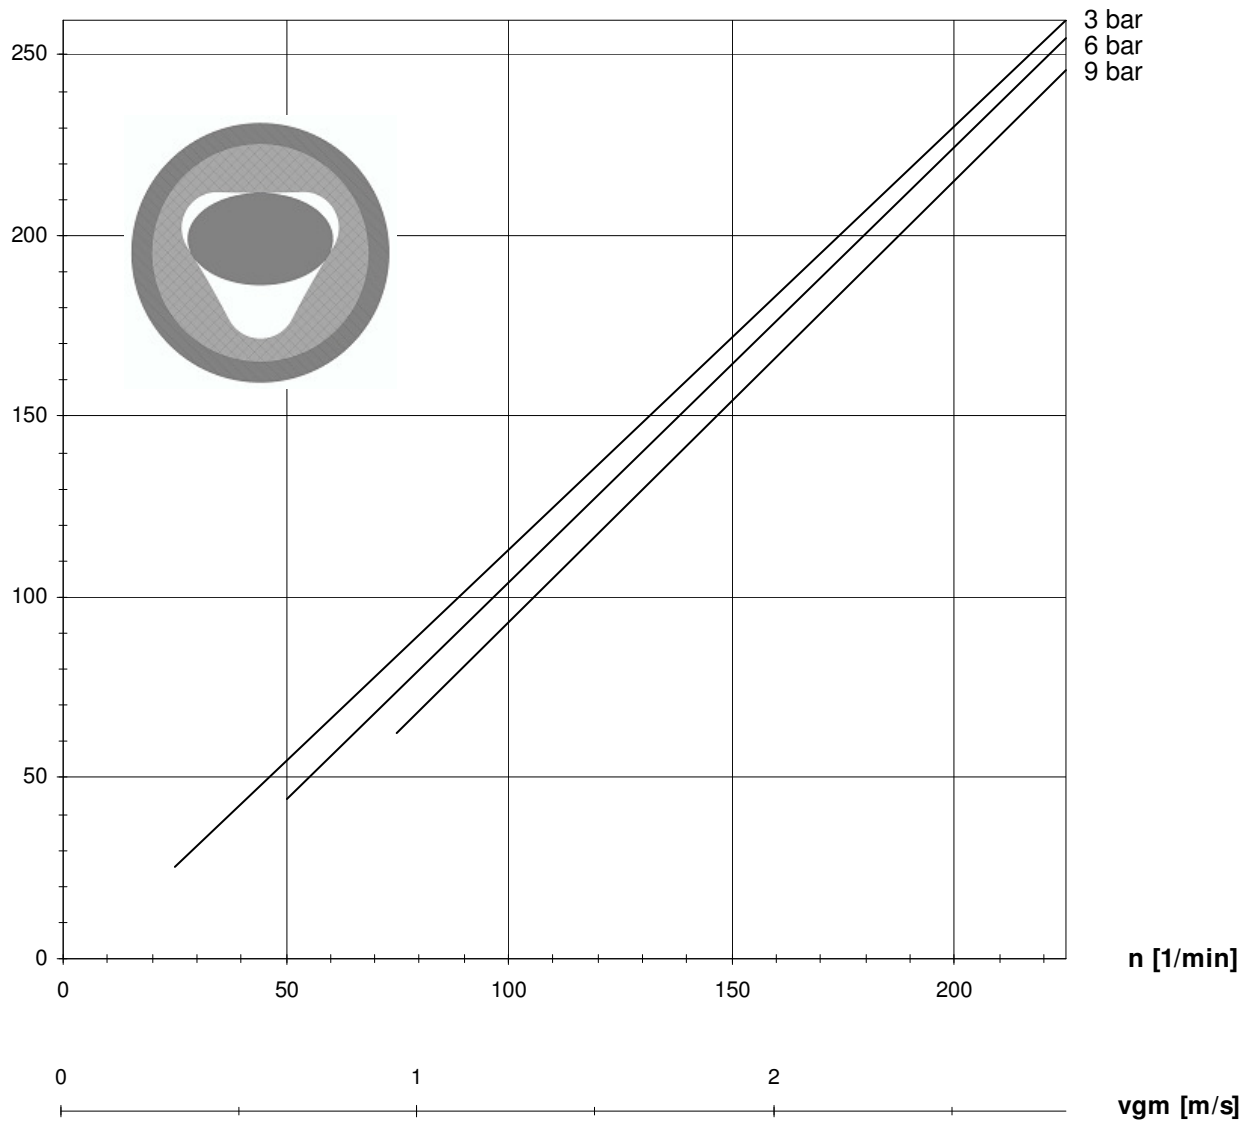

P [kW]

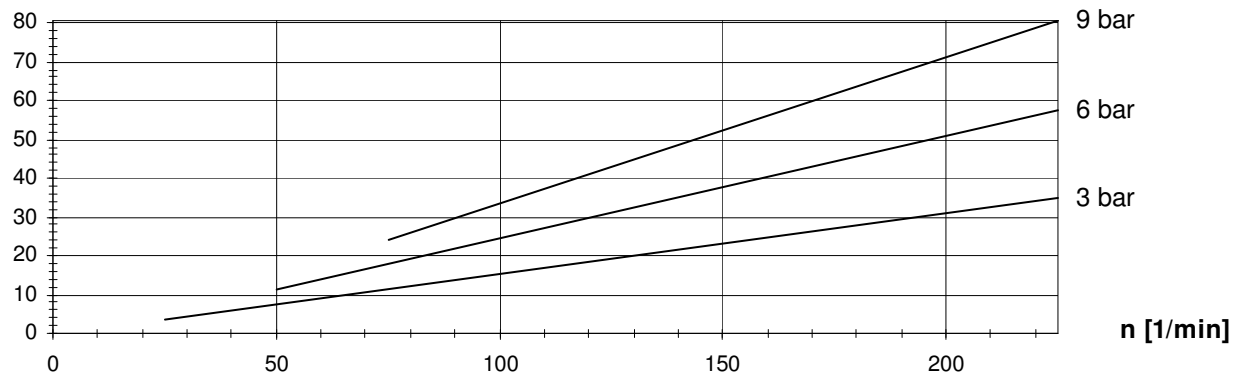


Losbrechmoment / starting torque T(L) = 1839 Nm


Druck / pressure	T
3 bar	1390 Nm
6 bar	2364 Nm
9 bar	3332 Nm

Gültigkeit für Wasser (1 cP) bei 20 °C. Toleranzen nach VDMA 24284 (+10%/-5%).  
 Valid for water (1 cP) at 20 °C (70 °F). Tolerances are in accordance with VDMA 24284 (+10%/-5%).

Q [m³/h]

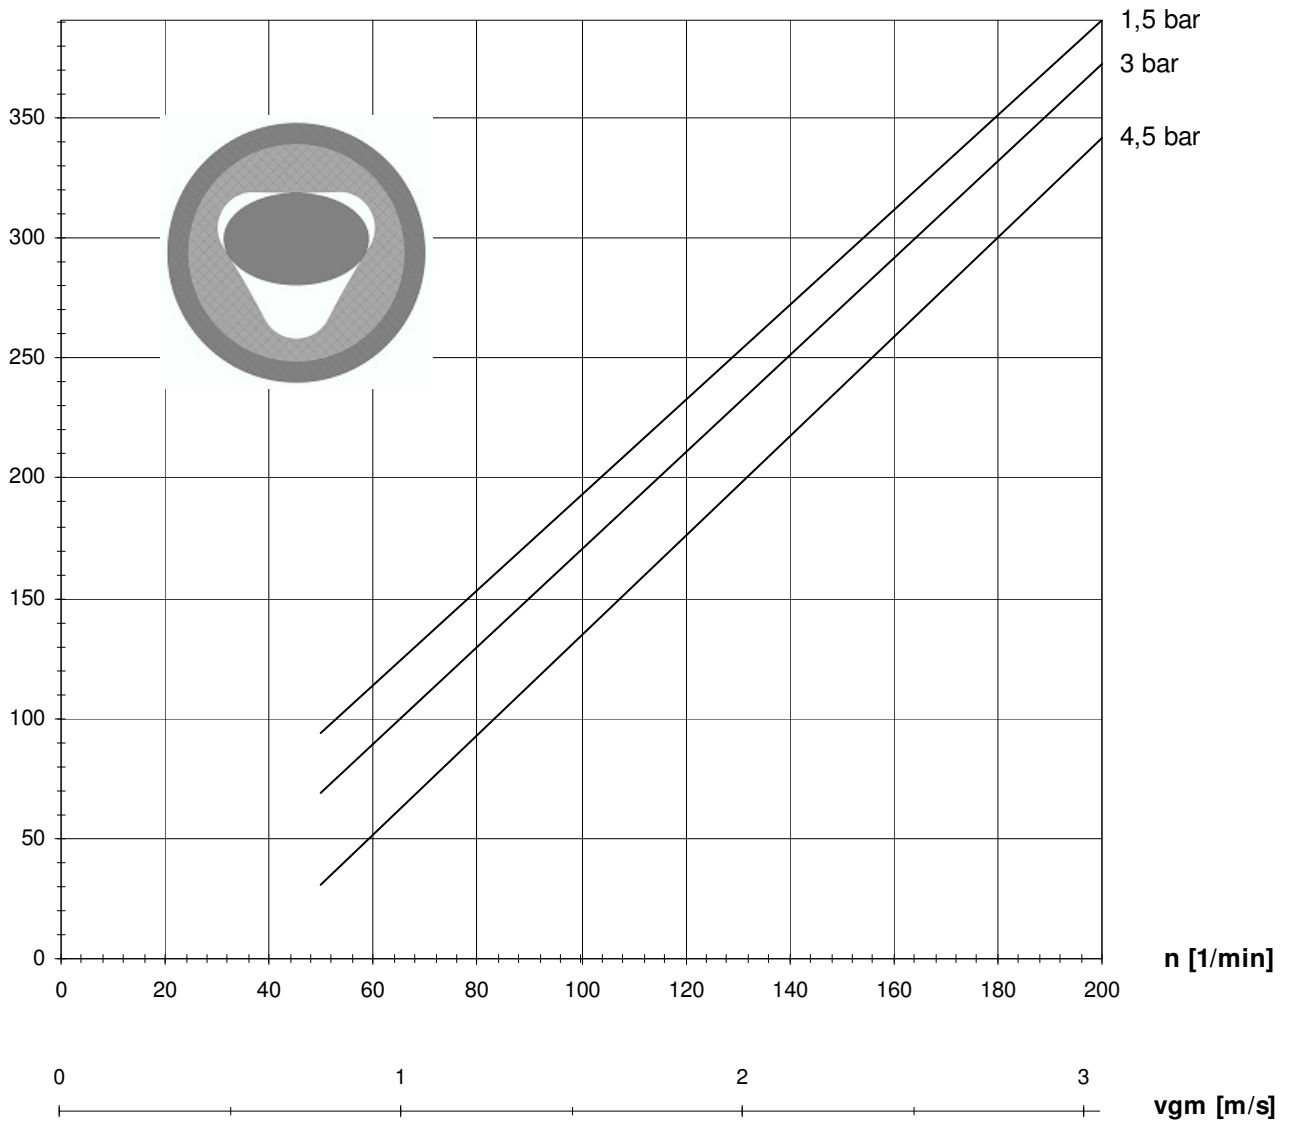

P [kW]

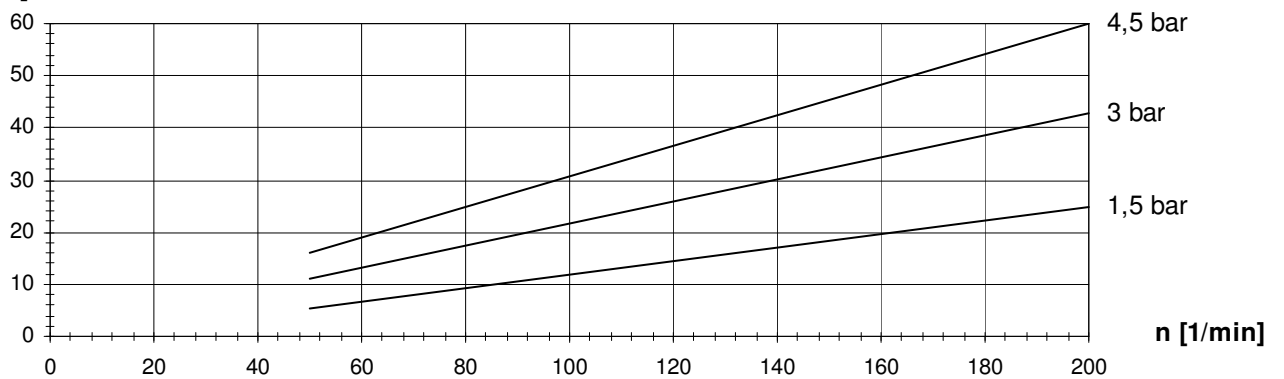


Losbrechmoment / starting torque T(L) = 2000 Nm

Druck / pressure	T
1,5 bar	1200 Nm
3 bar	2060 Nm
4,5 bar	2870 Nm


Gültigkeit für Wasser (1 cP) bei 20 °C. Toleranzen nach VDMA 24284 (+10%/-5%).  
 Valid for water (1 cP) at 20 °C (70 °F). Tolerances are in accordance with VDMA 24284 (+10%/-5%).



Q [m³/h]

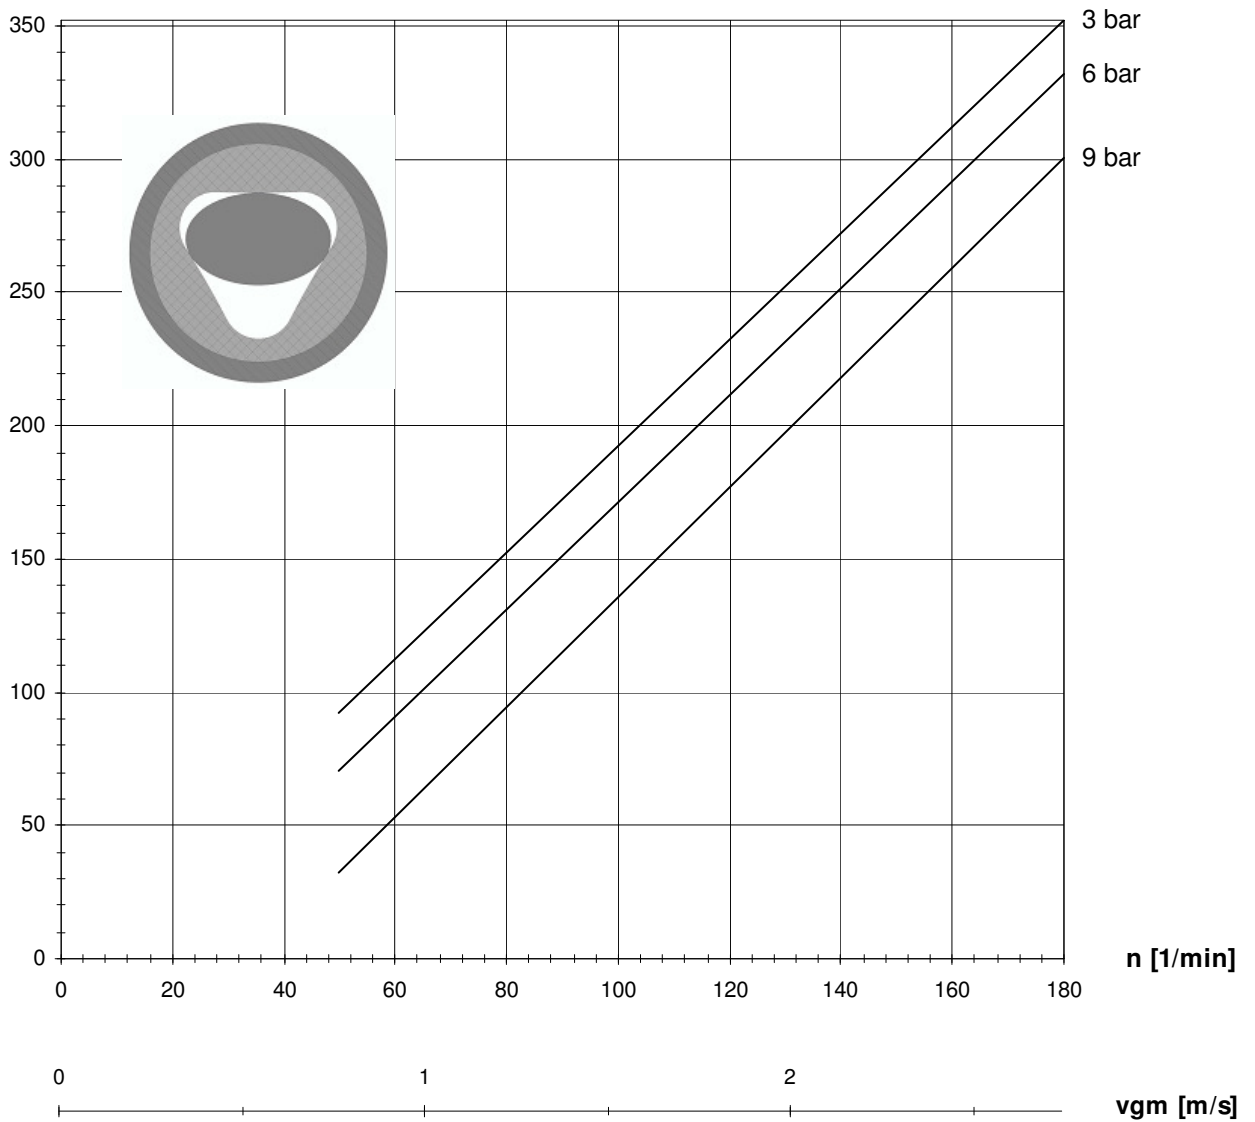

P [kW]

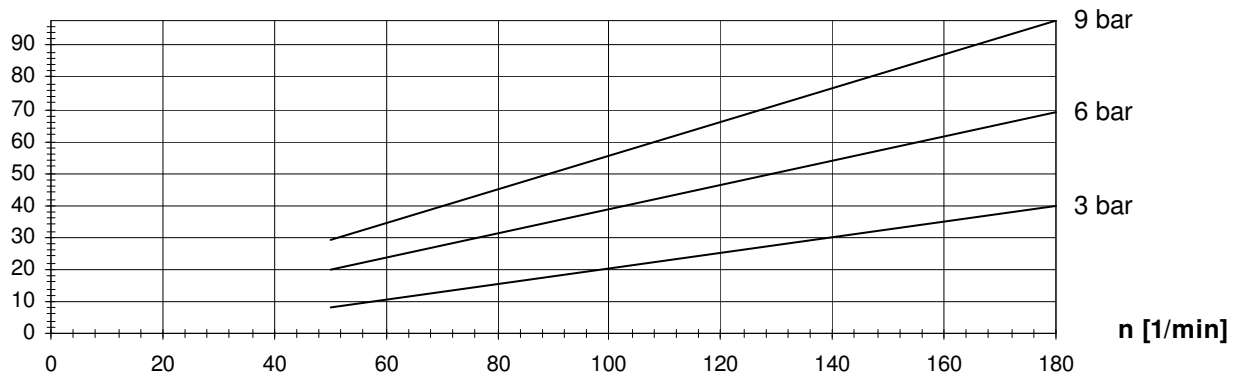

Losbrechmoment / starting torque T(L) = 2500 Nm

Druck / pressure	T
3 bar	1962 Nm
6 bar	3687 Nm
9 bar	5280 Nm

Gültigkeit für Wasser (1 cP) bei 20 °C. Toleranzen nach VDMA 24284 (+10%/-5%).  
 Valid for water (1 cP) at 20 °C (70 °F). Tolerances are in accordance with VDMA 24284 (+10%/-5%).