



Q [m³/h]

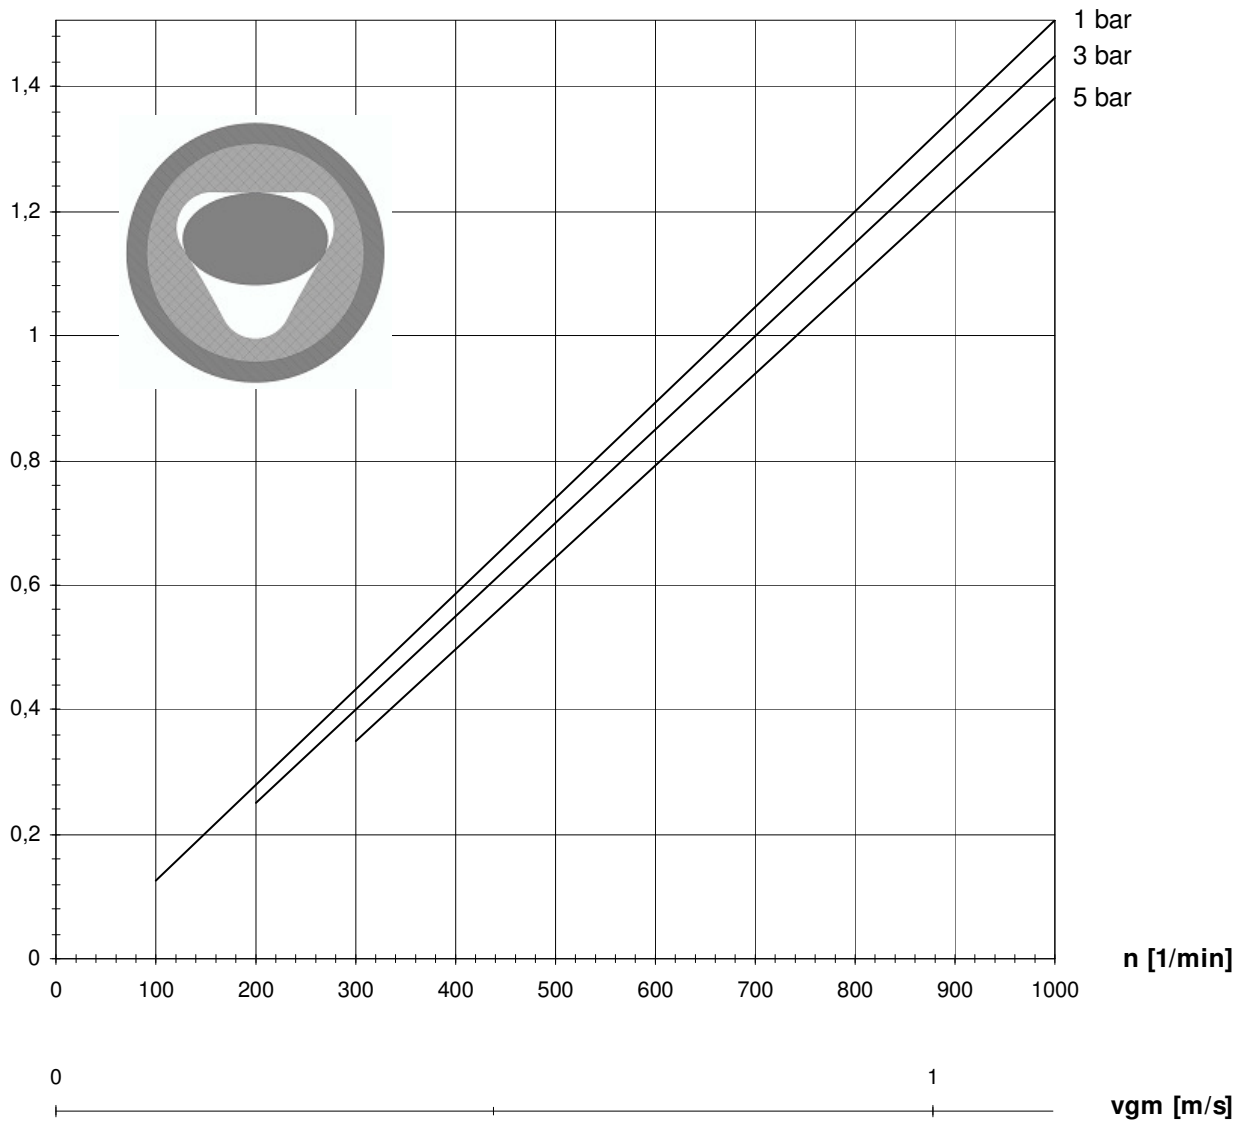

P [kW]

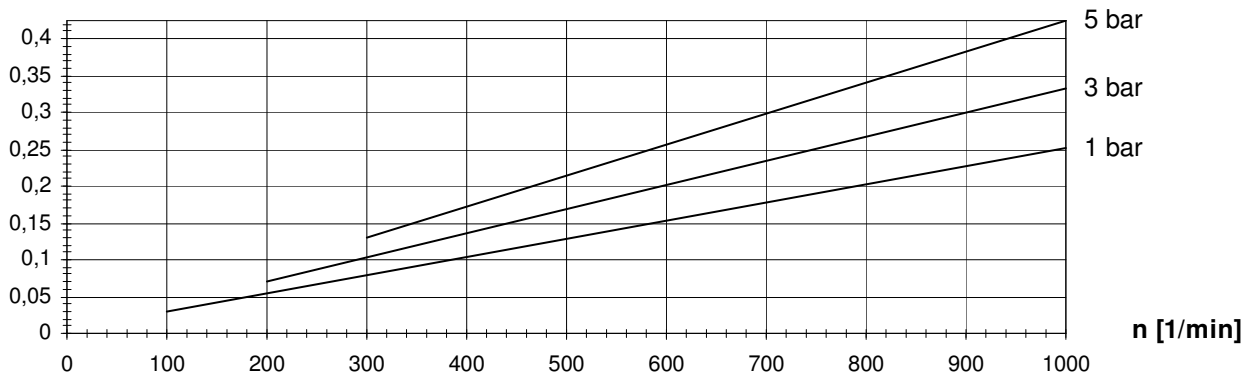


Losbrechmoment / starting torque T(L) = 4,8 Nm


Druck / pressure	T
1 bar	2,8 Nm
3 bar	3,2 Nm
5 bar	3,9 Nm

Gültigkeit für Wasser (1 cP) bei 20 °C. Toleranzen nach VDMA 24284 (+10%/-5%).  
 Valid for water (1 cP) at 20 °C (70 °F). Tolerances are in accordance with VDMA 24284 (+10%/-5%).

Q [m³/h]

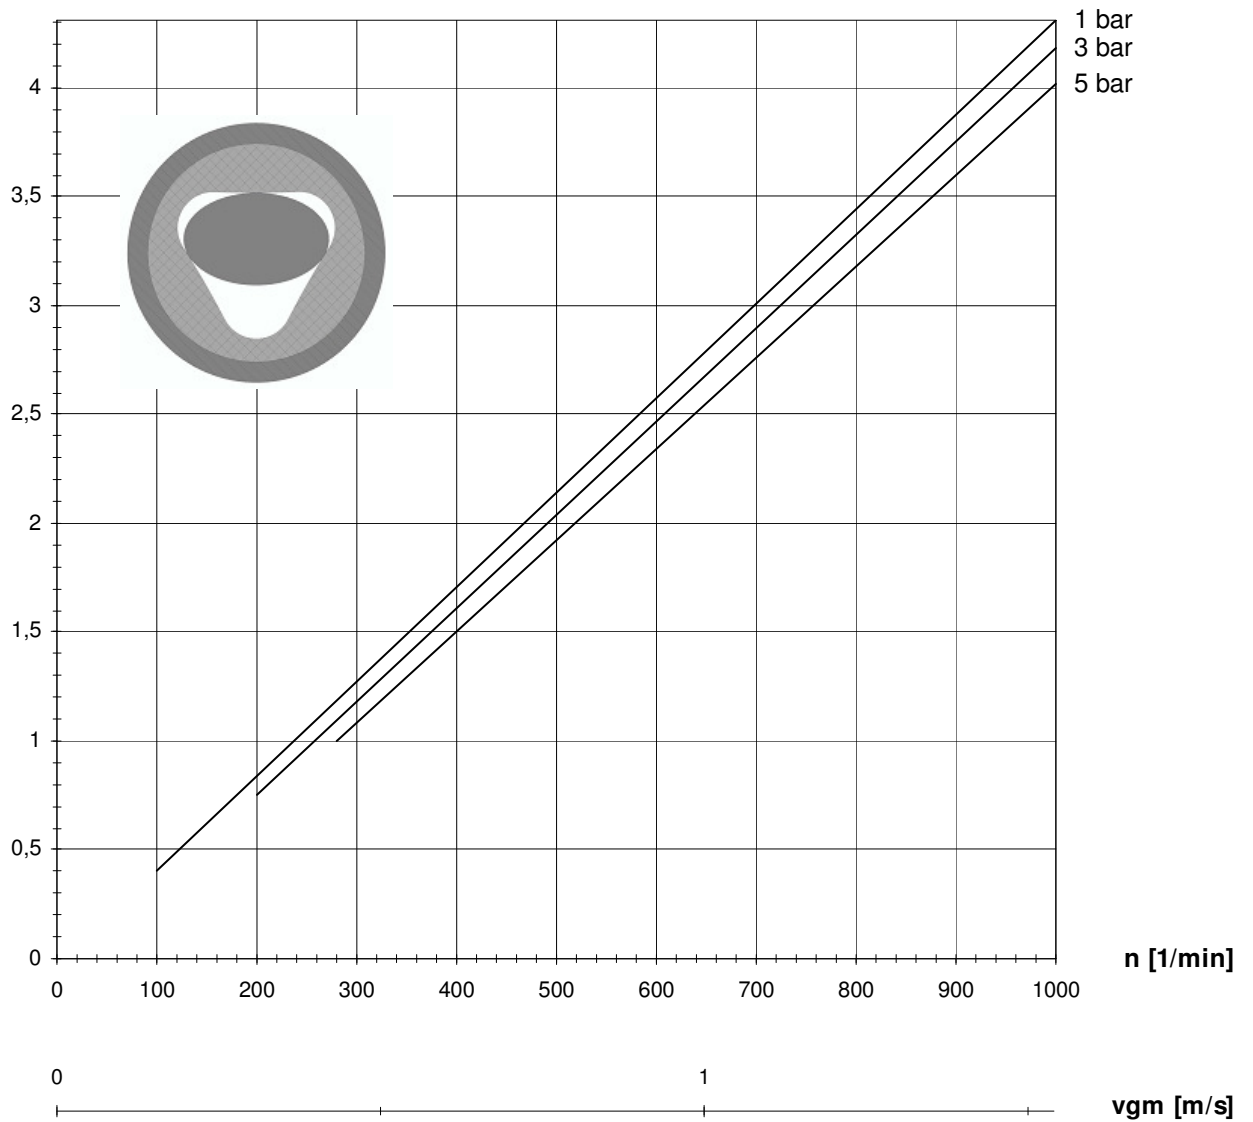

P [kW]

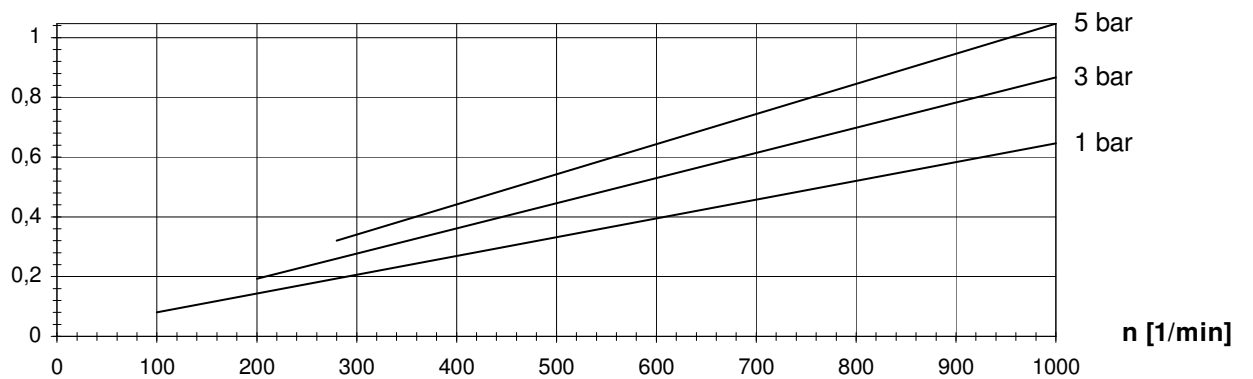


Losbrechmoment / starting torque T(L) = 13 Nm


Druck / pressure	T
1 bar	6,6 Nm
3 bar	8,5 Nm
5 bar	10,6 Nm

Gültigkeit für Wasser (1 cP) bei 20 °C. Toleranzen nach VDMA 24284 (+10%/-5%).  
 Valid for water (1 cP) at 20 °C (70 °F). Tolerances are in accordance with VDMA 24284 (+10%/-5%).

Q [m³/h]

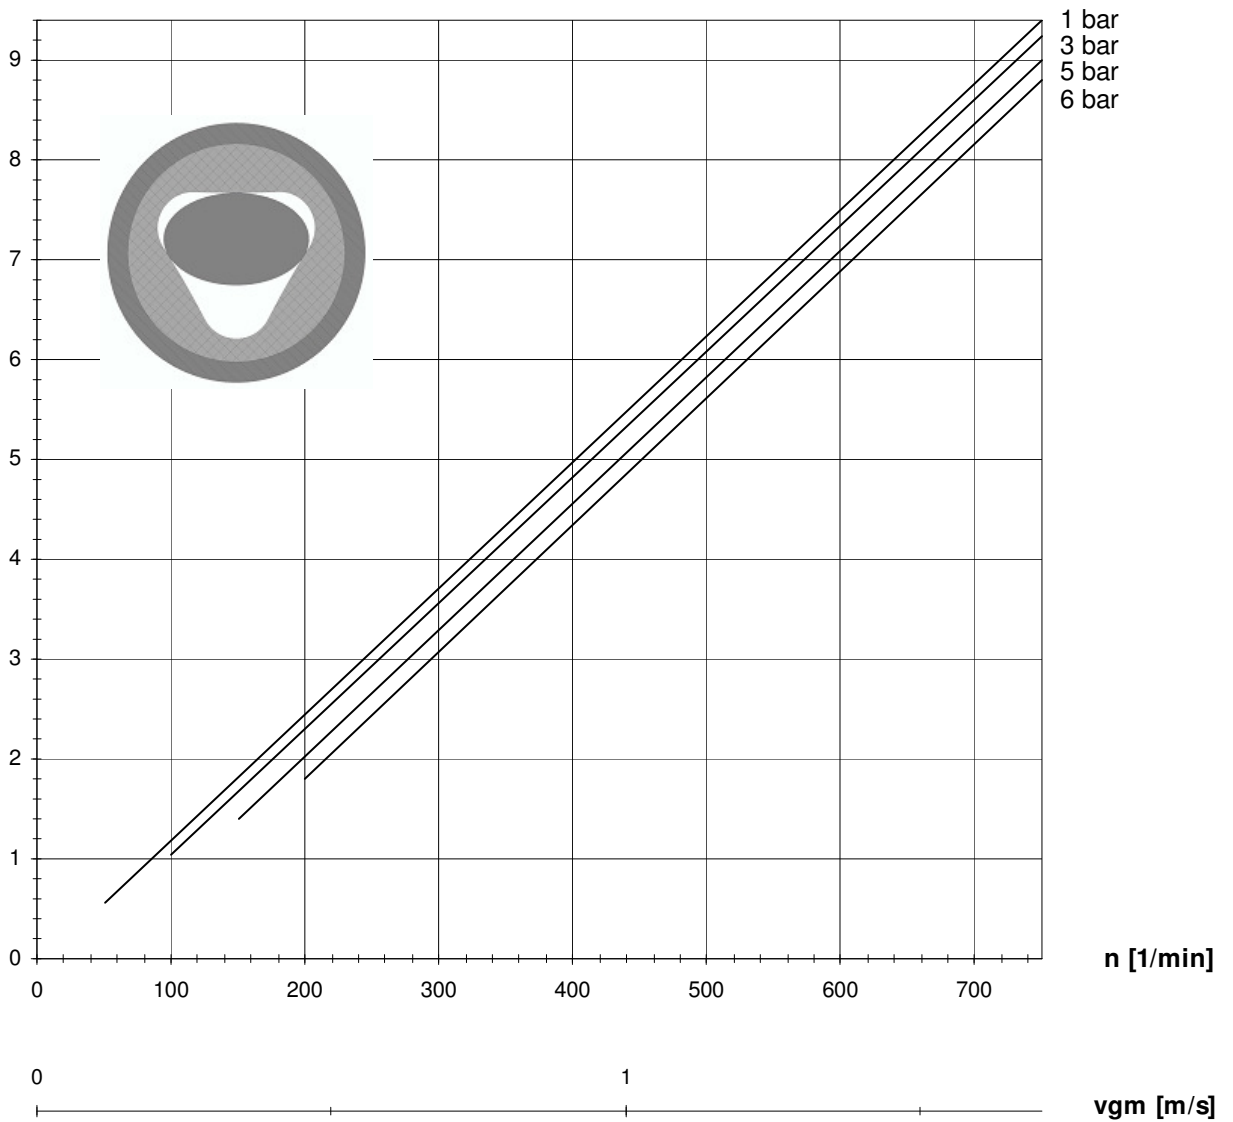

P [kW]

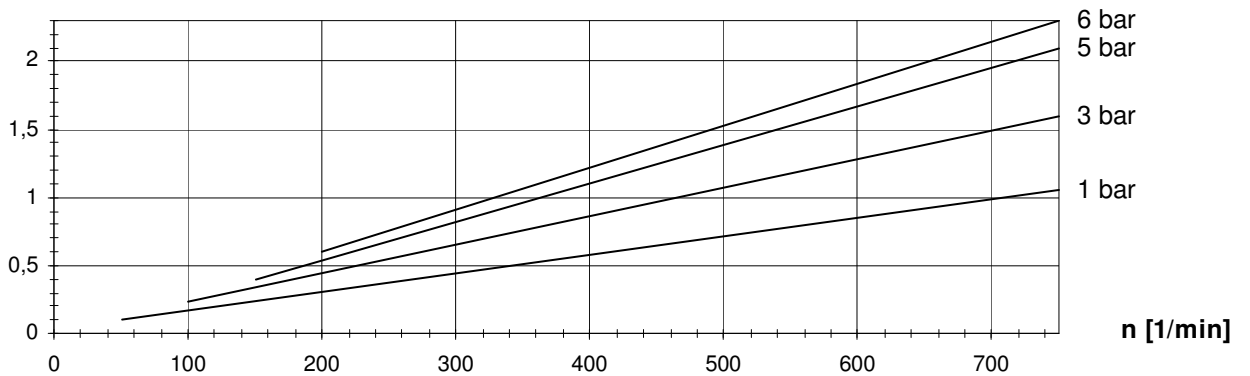


Losbrechmoment / starting torque T(L) = 34 Nm


Druck / pressure	T
1 bar	20 Nm
3 bar	23 Nm
5 bar	27 Nm
6 bar	30 Nm

Gültigkeit für Wasser (1 cP) bei 20 °C. Toleranzen nach VDMA 24284 (+10%/-5%).  
 Valid for water (1 cP) at 20 °C (70 °F). Tolerances are in accordance with VDMA 24284 (+10%/-5%).

Q [m³/h]

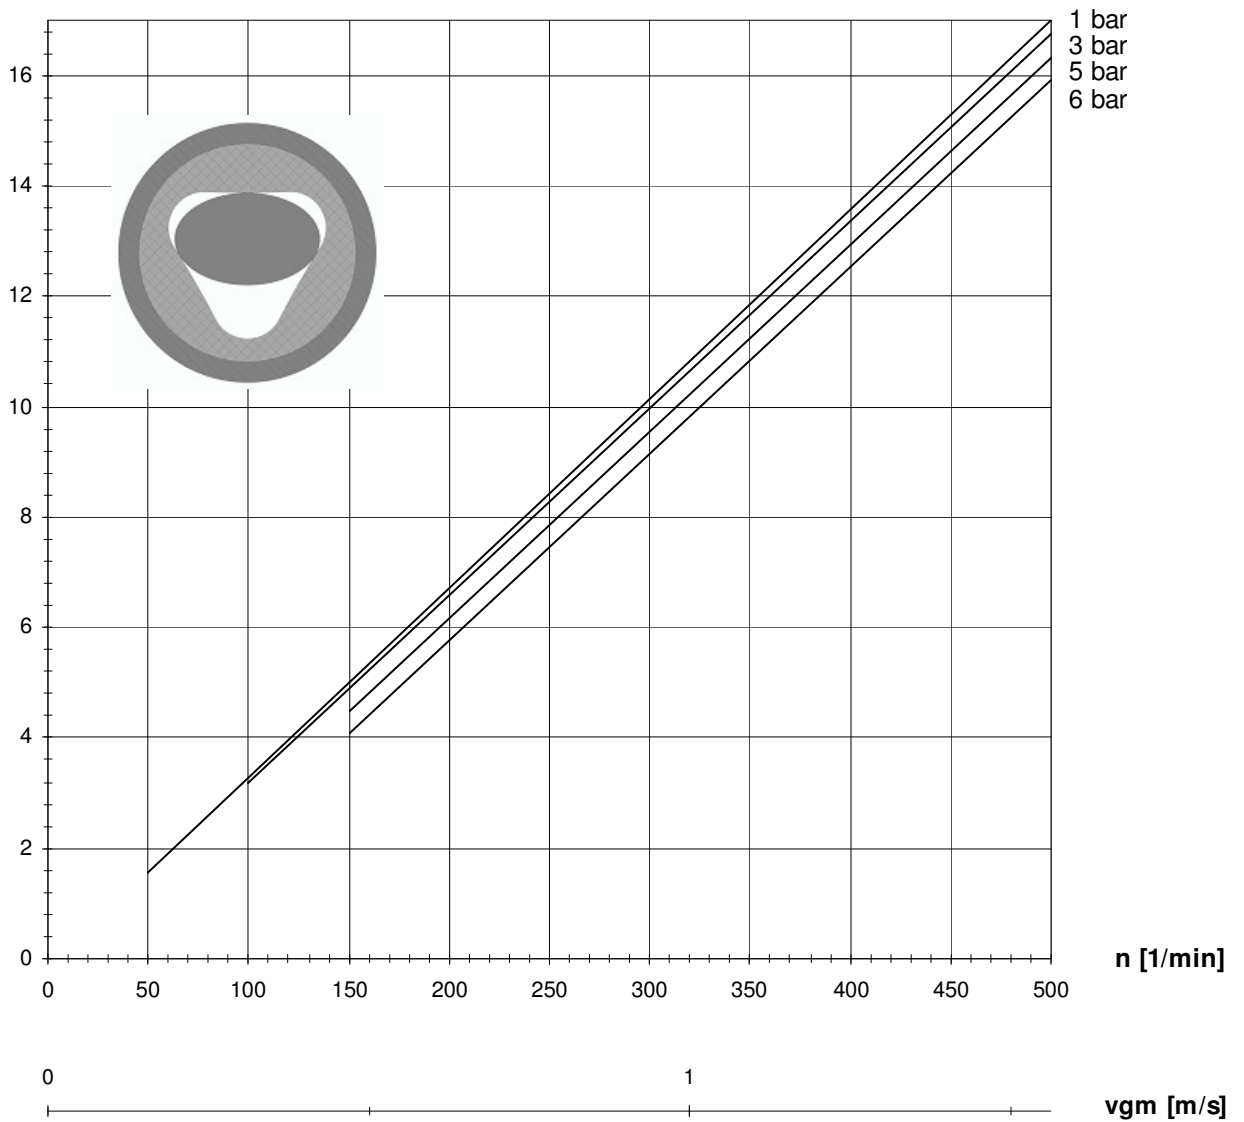

P [kW]

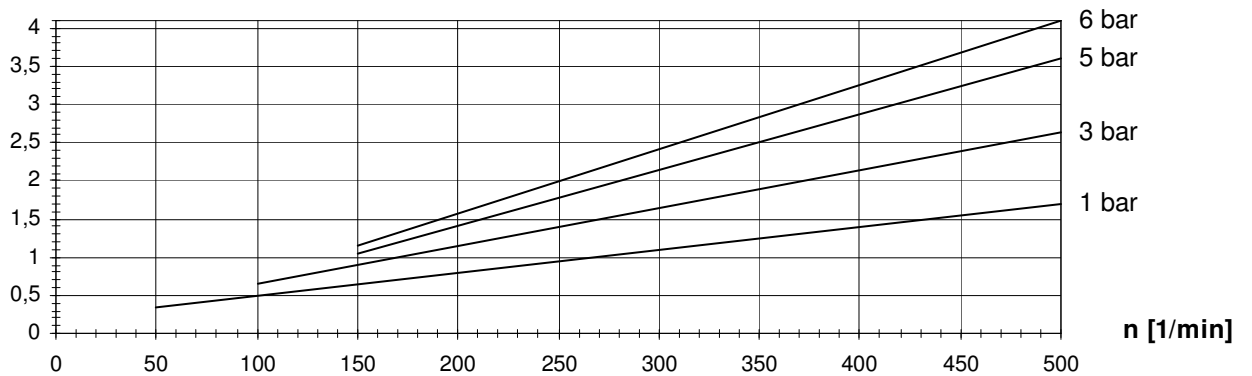


Losbrechmoment / starting torque T(L) = 88 Nm


Druck / pressure	T
1 bar	65 Nm
3 bar	64 Nm
5 bar	71 Nm
6 bar	80 Nm

Gültigkeit für Wasser (1 cP) bei 20 °C. Toleranzen nach VDMA 24284 (+10%/-5%).  
 Valid for water (1 cP) at 20 °C (70 °F). Tolerances are in accordance with VDMA 24284 (+10%/-5%).

Q [m³/h]

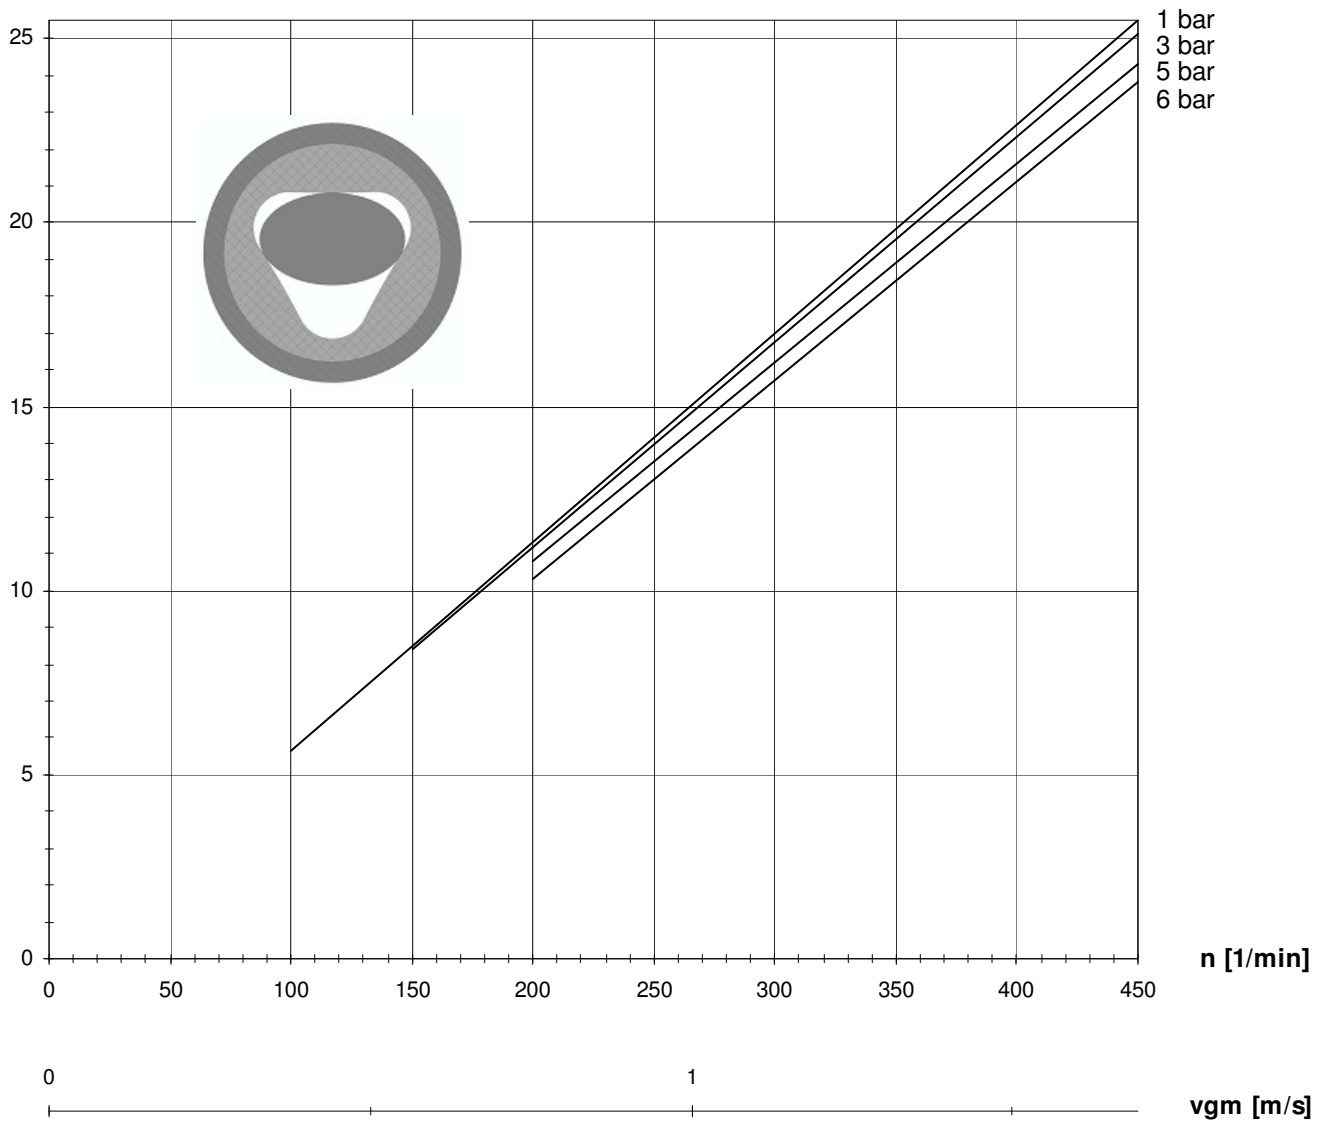

P [kW]

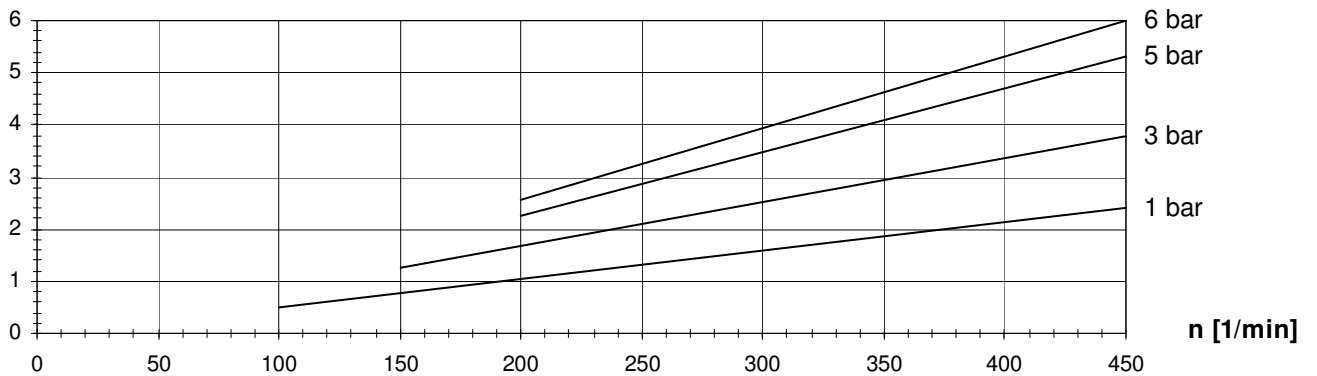


Losbrechmoment / starting torque T(L) = 98 Nm


Druck / pressure	T
1 bar	52 Nm
3 bar	83 Nm
5 bar	116 Nm
6 bar	131 Nm

Gültigkeit für Wasser (1 cP) bei 20 °C. Toleranzen nach VDMA 24284 (+10%/-5%).  
 Valid for water (1 cP) at 20 °C (70 °F). Tolerances are in accordance with VDMA 24284 (+10%/-5%).

Q [m³/h]

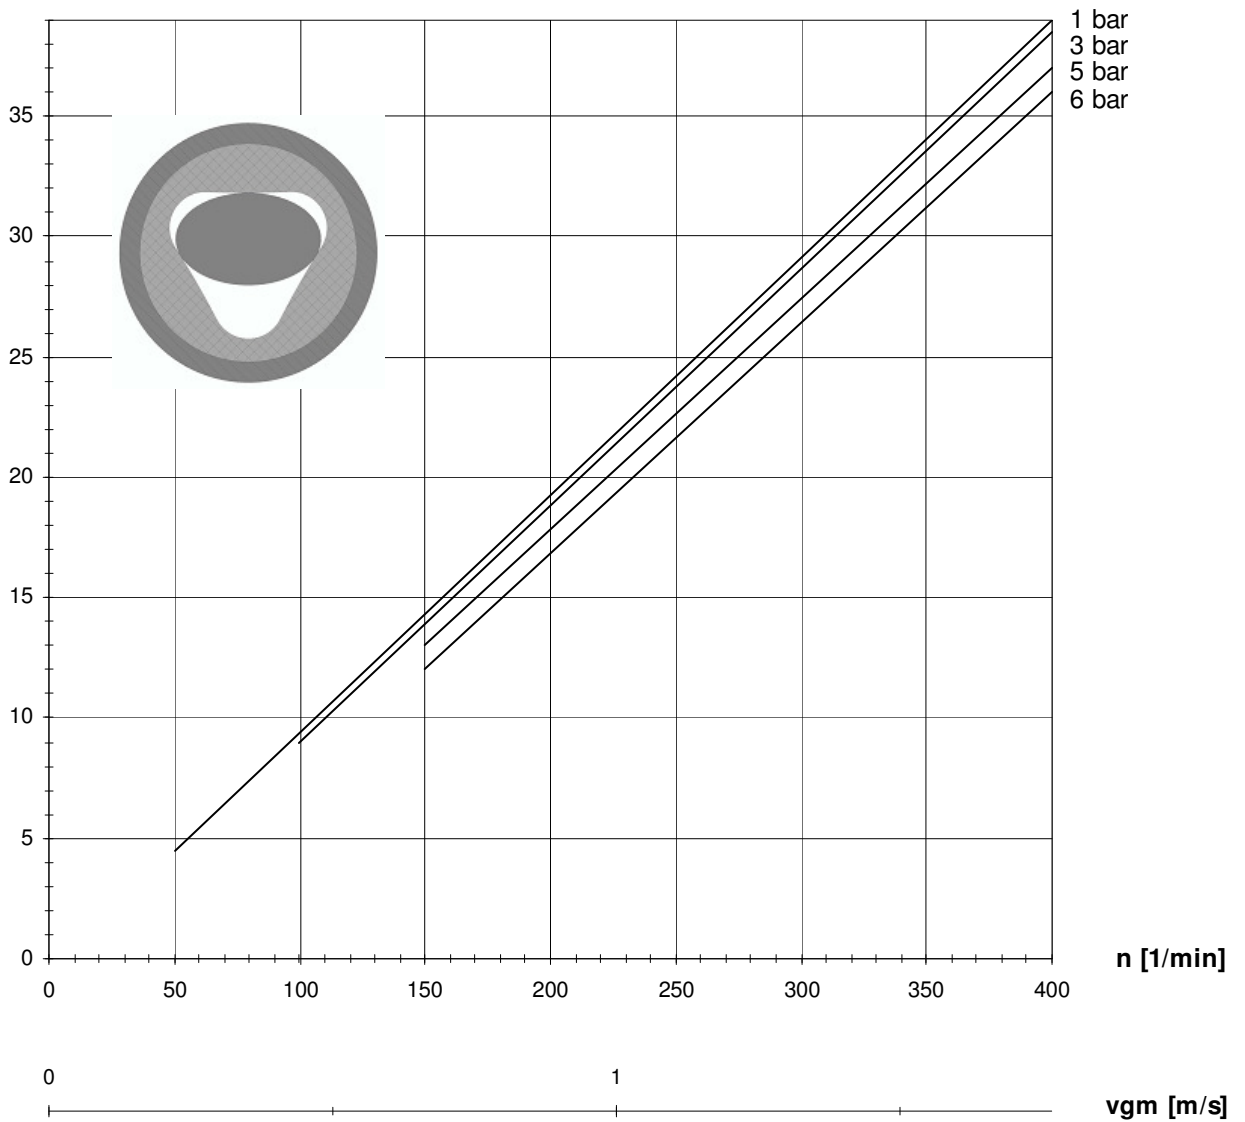

P [kW]

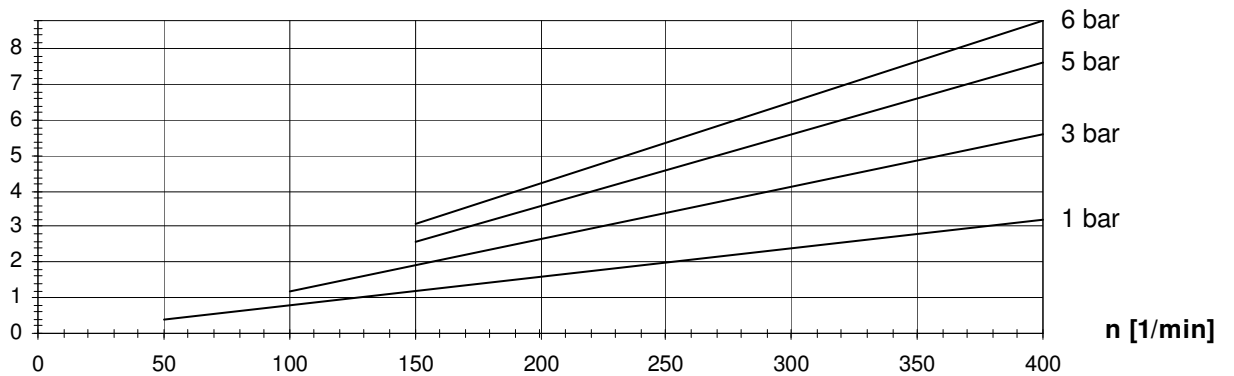


Losbrechmoment / starting torque T(L) = 180 Nm


Druck / pressure	T
1 bar	78 Nm
3 bar	137 Nm
5 bar	186 Nm
6 bar	216 Nm

Gültigkeit für Wasser (1 cP) bei 20 °C. Toleranzen nach VDMA 24284 (+10%/-5%).  
 Valid for water (1 cP) at 20 °C (70 °F). Tolerances are in accordance with VDMA 24284 (+10%/-5%).

Q [m³/h]

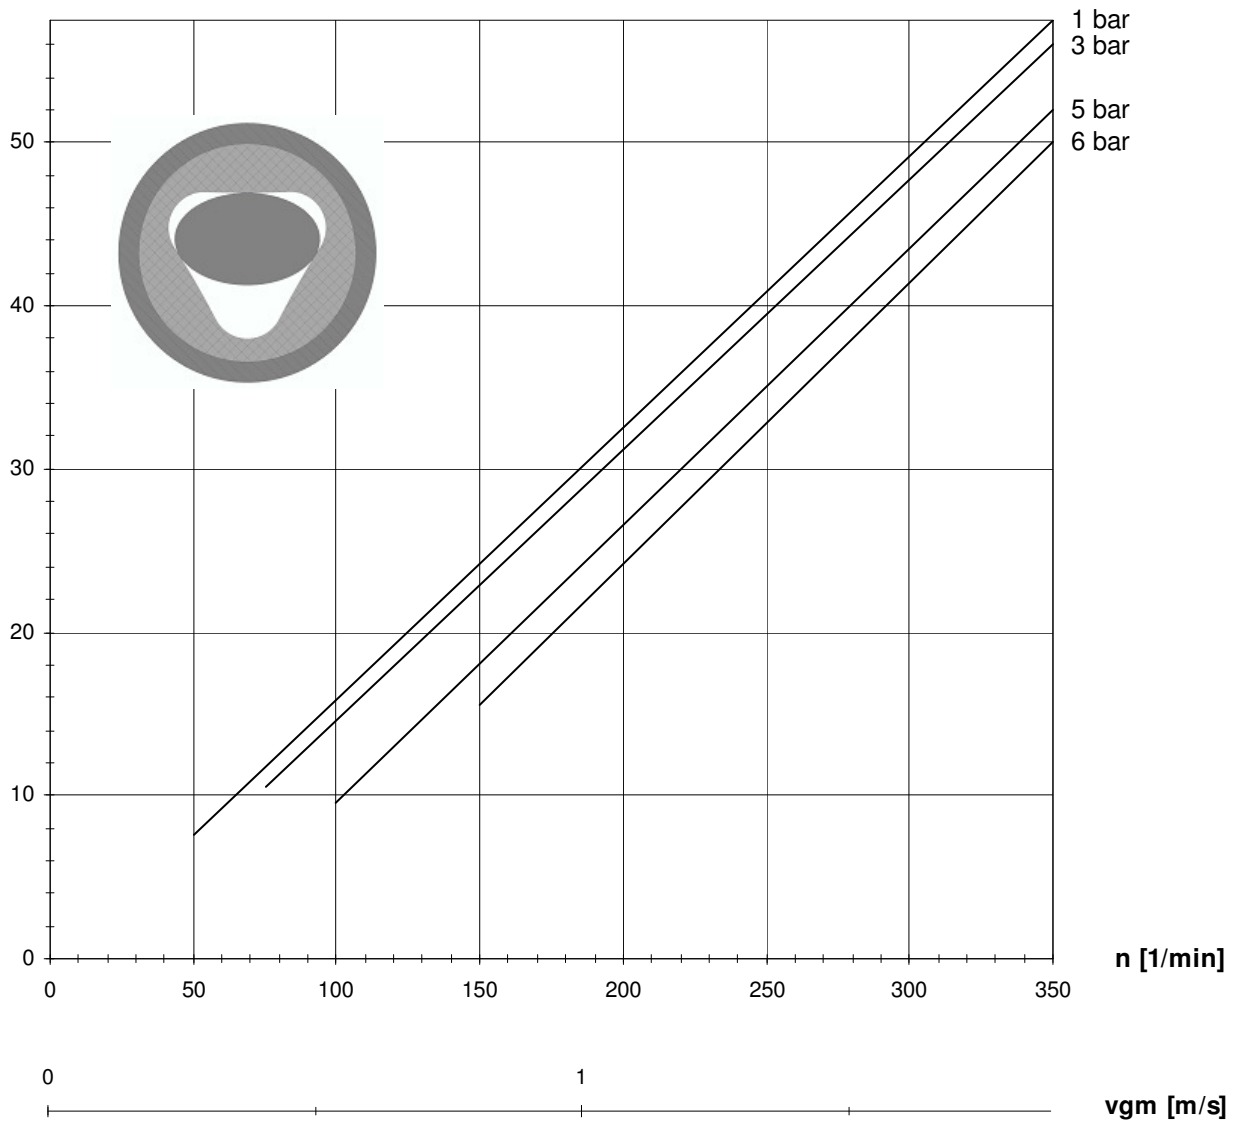

P [kW]

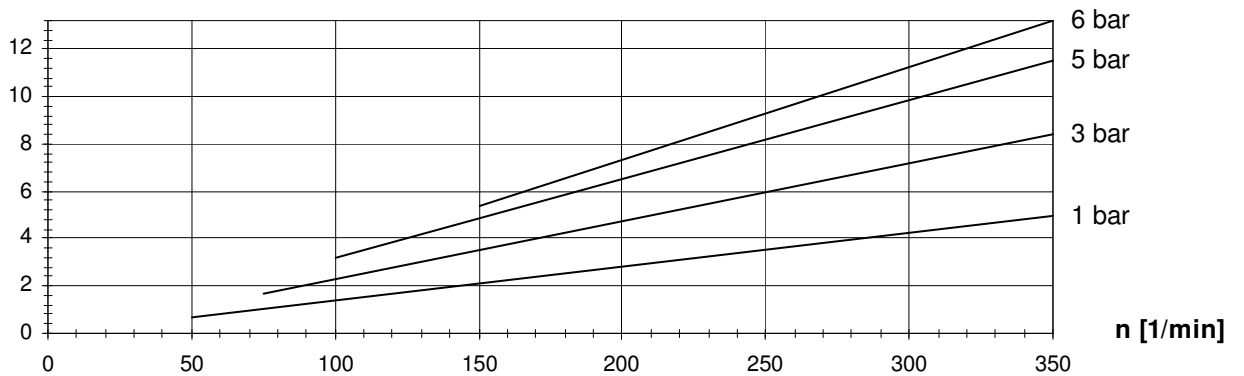


Losbrechmoment / starting torque T(L) = 265 Nm


Druck / pressure	T
1 bar	136 Nm
3 bar	229 Nm
5 bar	314 Nm
6 bar	360 Nm

Gültigkeit für Wasser (1 cP) bei 20 °C. Toleranzen nach VDMA 24284 (+10%/-5%).  
 Valid for water (1 cP) at 20 °C (70 °F). Tolerances are in accordance with VDMA 24284 (+10%/-5%).

Q [m³/h]

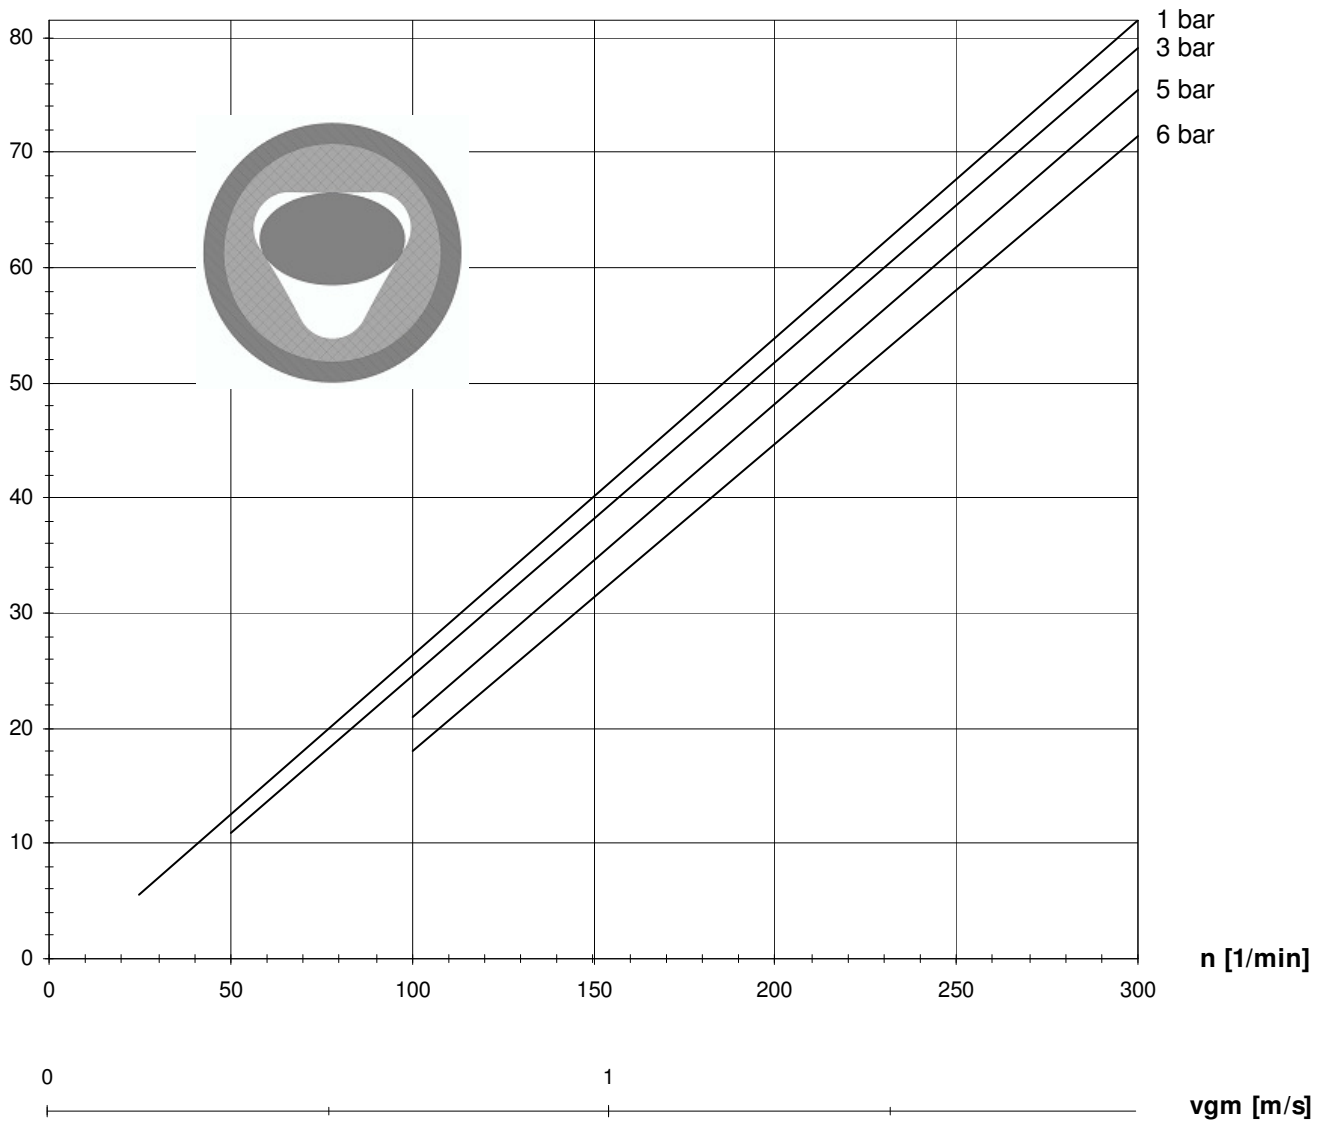

P [kW]

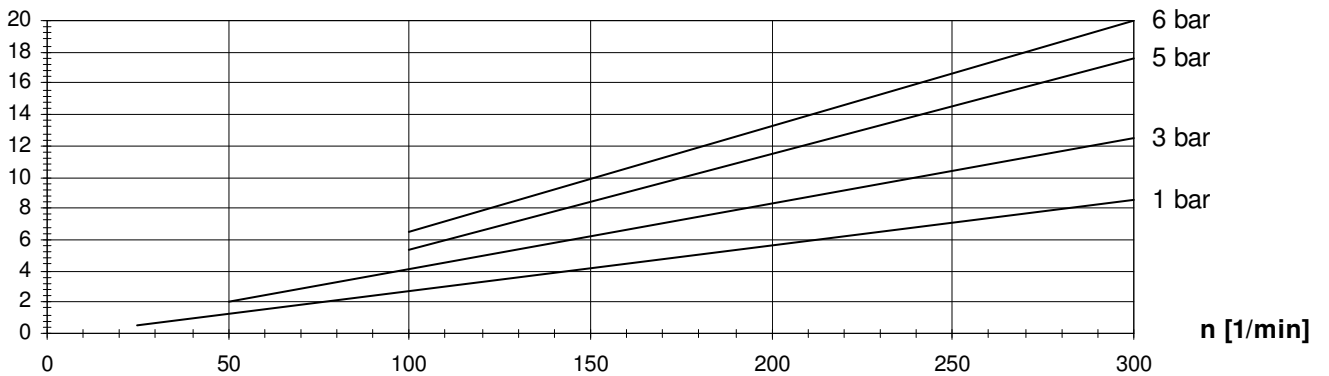


Losbrechmoment / starting torque T(L) = 460 Nm

Druck / pressure	T
1 bar	271 Nm
3 bar	398 Nm
5 bar	561 Nm
6 bar	637 Nm


Gültigkeit für Wasser (1 cP) bei 20 °C. Toleranzen nach VDMA 24284 (+10%/-5%).  
 Valid for water (1 cP) at 20 °C (70 °F). Tolerances are in accordance with VDMA 24284 (+10%/-5%).



Q [m³/h]

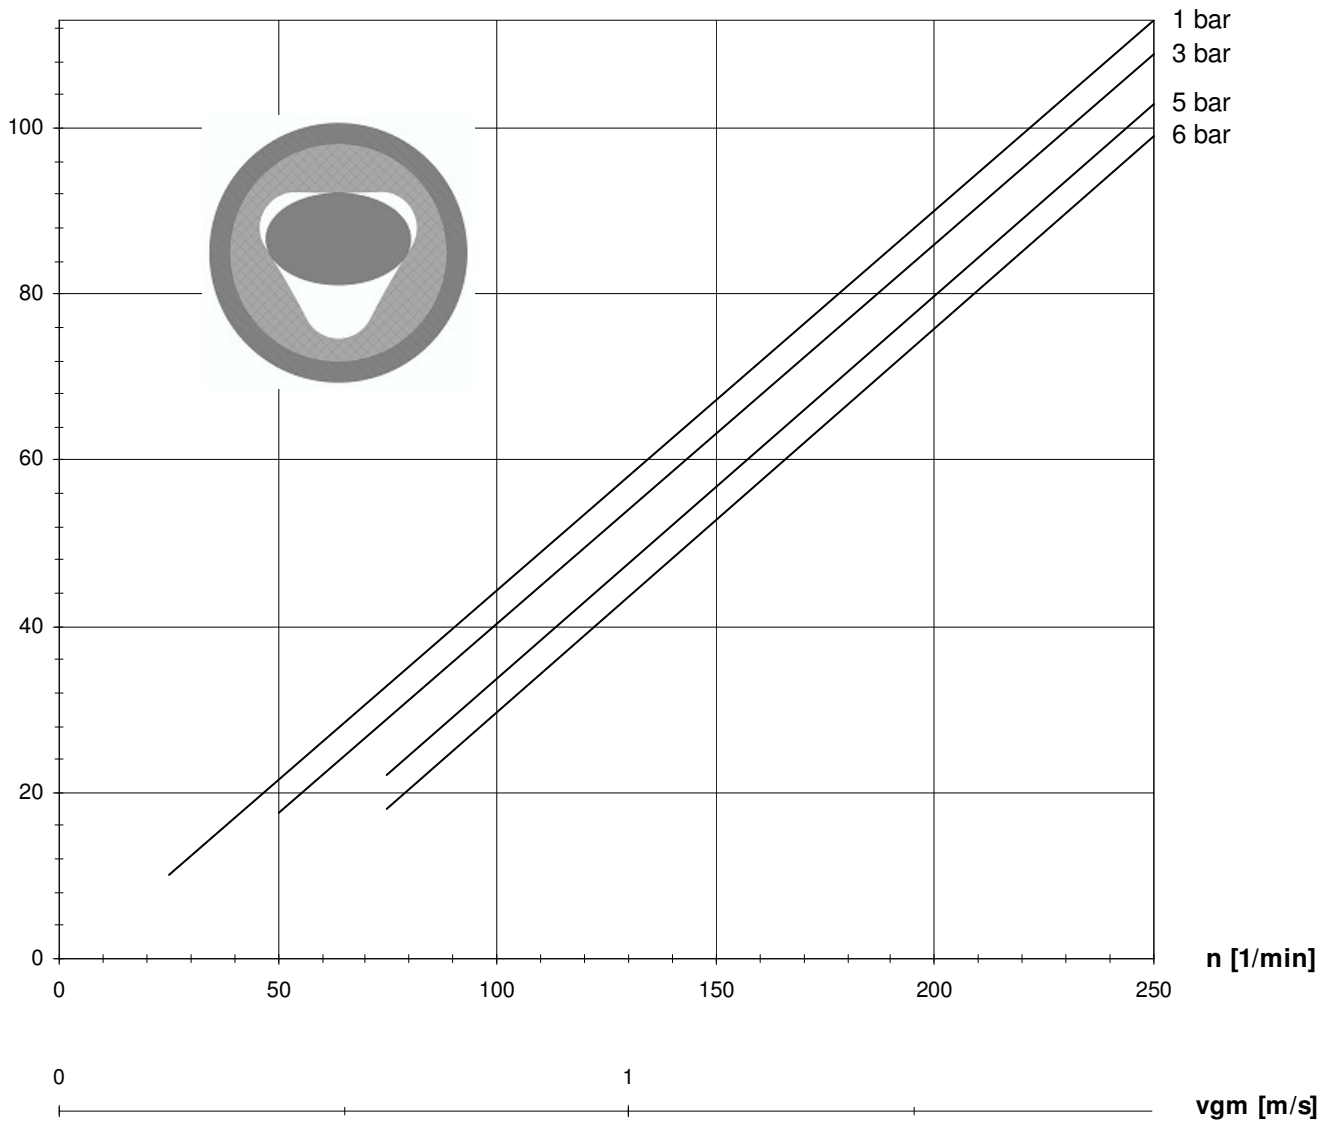

P [kW]

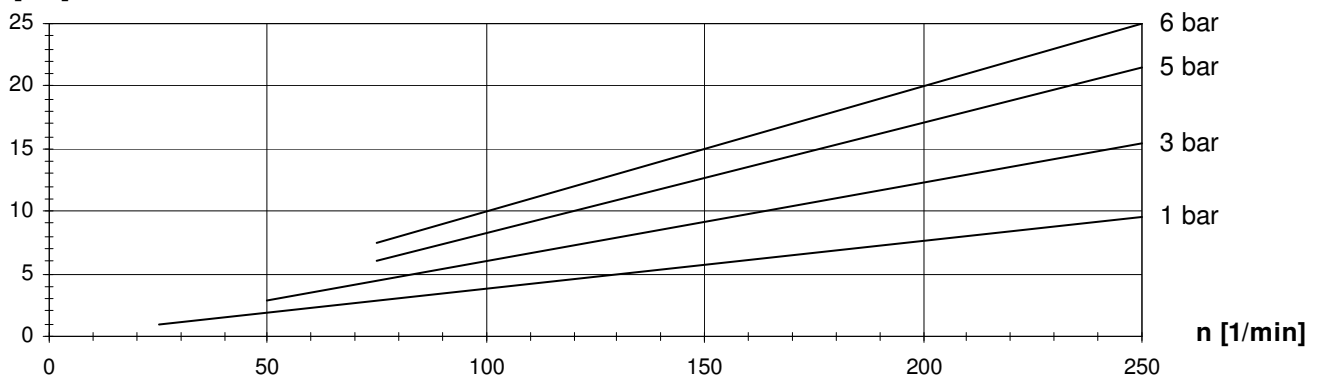

Losbrechmoment / starting torque T(L) = 650 Nm

Druck / pressure	T
1 bar	382 Nm
3 bar	592 Nm
5 bar	822 Nm
6 bar	955 Nm

Gültigkeit für Wasser (1 cP) bei 20 °C. Toleranzen nach VDMA 24284 (+10%/-5%).  
 Valid for water (1 cP) at 20 °C (70 °F). Tolerances are in accordance with VDMA 24284 (+10%/-5%).